
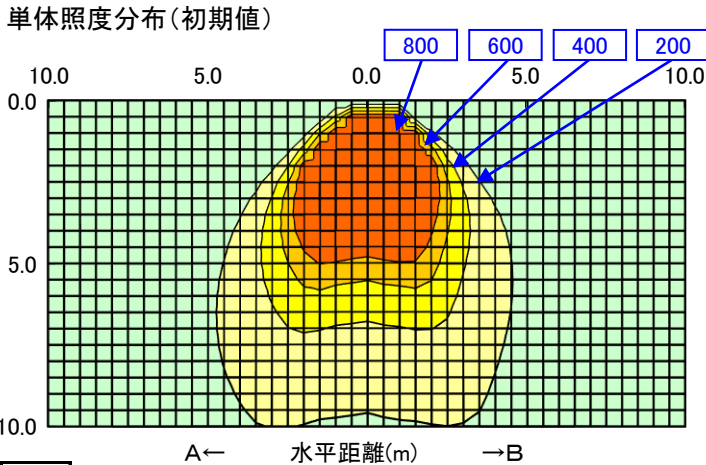
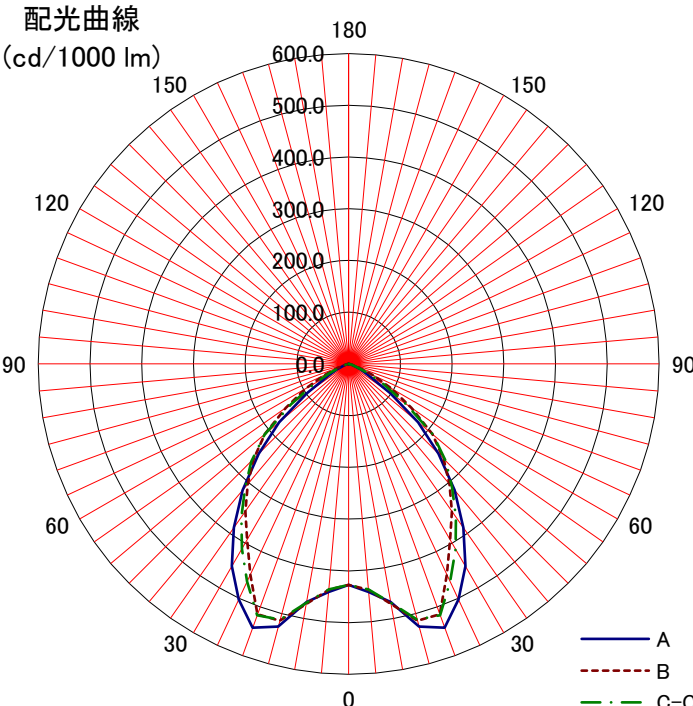


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%																																																																																																																									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: MTE44AMN-Z24A	床	10%															0%																																																																																																																							
		室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 配光角(広角)	0.6	0.67	0.57	0.51	0.66	0.57	0.51	0.47	0.56	0.50	0.46	0.55	0.50	0.46	0.45																																																																																																																									
	0.8	0.77	0.68	0.62	0.76	0.68	0.62	0.58	0.66	0.61	0.57	0.65	0.61	0.57	0.55																																																																																																																									
姿図 	1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.62																																																																																																																									
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69																																																																																																																									
	1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74																																																																																																																									
	2	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80																																																																																																																									
	2.5	0.99	0.94	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.85	0.83																																																																																																																									
	3	1.00	0.96	0.93	0.99	0.95	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86																																																																																																																									
光源形式	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89																																																																																																																									
	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.96	0.95	0.94	0.91																																																																																																																									
器具光束 43,000 lm	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94																																																																																																																									
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97																																																																																																																									
器具効率 Ft= 100%		単体照度分布 (初期値)  単位照度分布 (初期値) 10.0 5.0 0.0 800 600 400 200 10.0 0.0 5.0 10.0 5.0 10.0 A ← 水平距離(m) → B (m) 高さ 0-200 200-400 400-600 600-800 800-1000																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm)  180 150 150 120 120 90 90 60 60 30 30 0 600.0 500.0 400.0 300.0 200.0 100.0 0.0 — A - - - B - · - C-C'																																																																																																																																						
A-A 1.40 H																																																																																																																																								
B-B 1.32 H																																																																																																																																								
保守率																																																																																																																																								
良	0.81																																																																																																																																							
中	0.79																																																																																																																																							
否	0.75																																																																																																																																							
光度 (cd/1000 lm)		<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>427</td><td>427</td><td>427</td><td></td><td></td></tr><tr><td>10</td><td>467</td><td>471</td><td>468</td><td></td><td></td></tr><tr><td>20</td><td>543</td><td>515</td><td>517</td><td></td><td></td></tr><tr><td>30</td><td>452</td><td>392</td><td>413</td><td></td><td></td></tr><tr><td>40</td><td>319</td><td>303</td><td>311</td><td></td><td></td></tr><tr><td>50</td><td>175</td><td>211</td><td>212</td><td></td><td></td></tr><tr><td>60</td><td>46</td><td>95</td><td>77</td><td></td><td></td></tr><tr><td>70</td><td>11</td><td>22</td><td>15</td><td></td><td></td></tr><tr><td>80</td><td>1</td><td>3</td><td>1</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	427	427	427			10	467	471	468			20	543	515	517			30	452	392	413			40	319	303	311			50	175	211	212			60	46	95	77			70	11	22	15			80	1	3	1			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	427																427	427																																																																																																																						
10	467																471	468																																																																																																																						
20	543																515	517																																																																																																																						
30	452																392	413																																																																																																																						
40	319																303	311																																																																																																																						
50	175																211	212																																																																																																																						
60	46																95	77																																																																																																																						
70	11																22	15																																																																																																																						
80	1																3	1																																																																																																																						
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								