
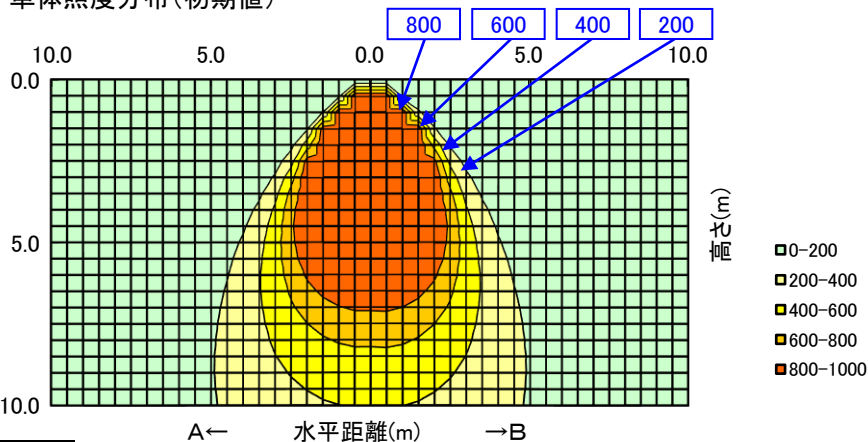
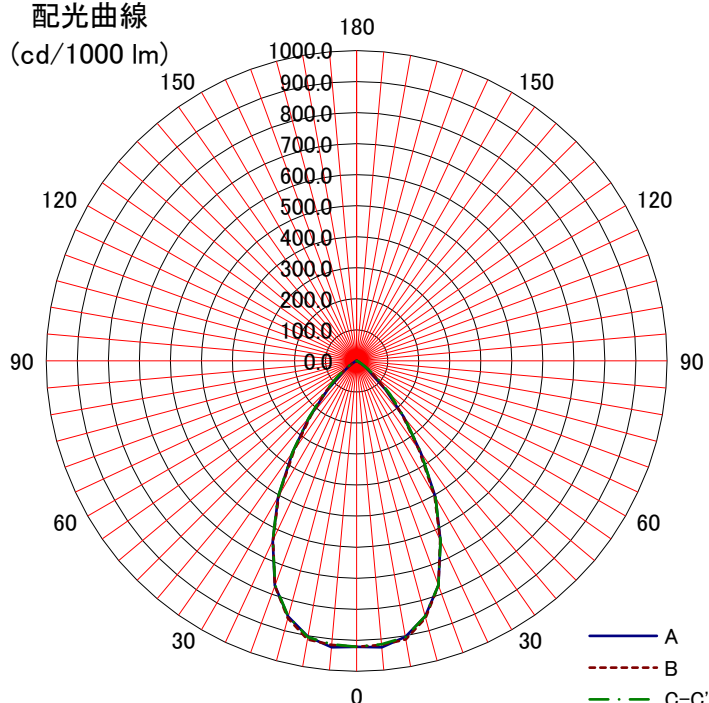


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%			50%			30%			0%			
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: MTE44ANN-Z24A		室指数	固有照明率 S/H=1.0																
			10%														0%		
<備考> 配光角(中角)		0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64			
		0.8	0.88	0.81	0.77	0.87	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.72			
姿図 		1	0.92	0.86	0.83	0.91	0.86	0.82	0.79	0.85	0.82	0.79	0.84	0.81	0.79	0.77			
		1.25	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.88	0.85	0.83	0.81			
		1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.91	0.88	0.86	0.85			
		2	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.89			
		2.5	1.03	1.00	0.97	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.96	0.94	0.93	0.91			
		3	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.97	0.95	0.94	0.92			
光源形式		4	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.94			
		5	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95			
器具光束 43,800 lm		7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	0.97			
		10	1.08	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	0.99			
器具効率 Ft= 100%			単体照度分布(初期値) 																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 0.96 H																			
B-B 0.96 H																			
保守率	良	0.81																	
	中	0.79																	
	否	0.75																	
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																
	A-0	B-B															C-0	A'-0	C'-0
0	921	921															921		
10	903	912															903		
20	770	771															769		
30	507	502															509		
40	236	229															241		
50	60	76															85		
60	15	15															17		
70	4	4	3																
80	1	1	1																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			