
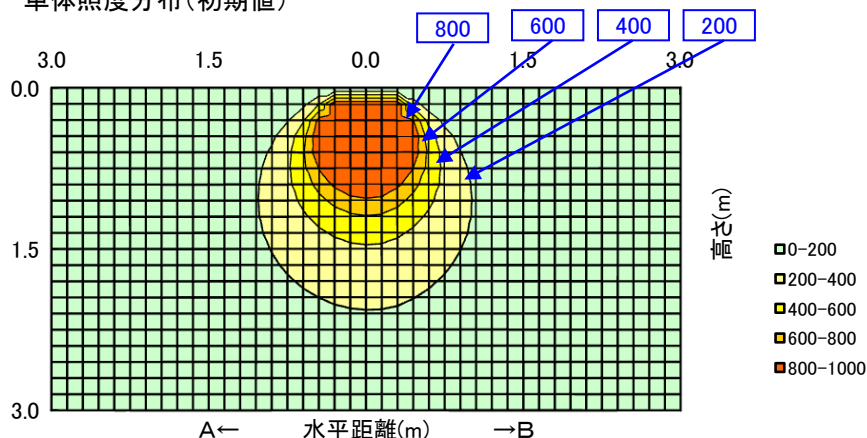
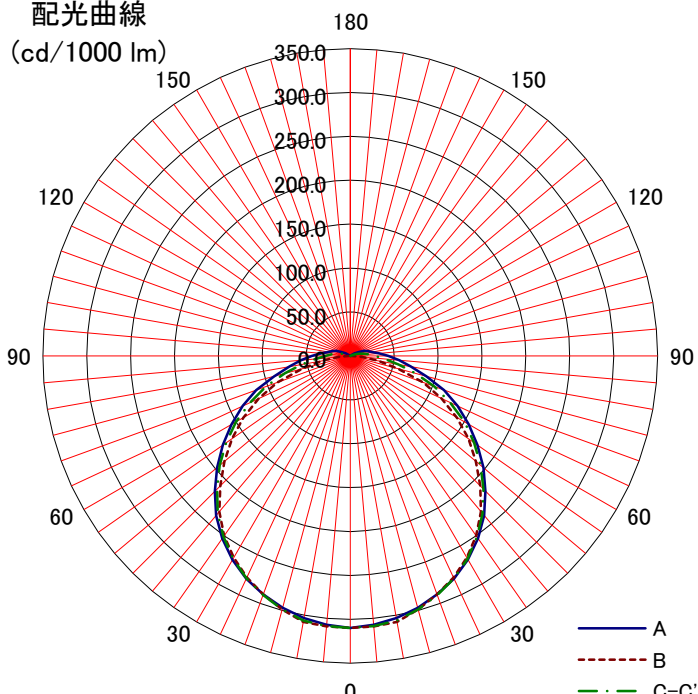


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NC4A	反射率	固有照明率 S/H=1.0														
<備考>	室指数															
		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28
姿図		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37
		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43
		1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49
		1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.73	0.81	0.76	0.72	0.78	0.74	0.71	0.67
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.77	0.84	0.79	0.76	0.81	0.77	0.74	0.71
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76	
CE402NA-J14	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.79	
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84	
2,750 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 3.5%																
下方光束 Fd= 96.5%																
最大取付間隔																
A-A 1.30 H																
B-B 1.28 H																
保守率	良	配光曲線 (cd/1000 lm) 														
	中															
	否															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	310	310	310													
10	303	307	306													
20	289	289	290													
30	268	265	267													
40	237	232	234													
50	198	187	194													
60	156	140	150													
70	114	88	102													
80	70	32	56													
90	44	1	28													
100	25		15													
110	17		6													
120	6															
130																
140																
150																
160																
170																
180																