

日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														
形式: NC4A		室指数	固有照明率 S/H=1.0														
<備考>		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28	
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
		1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49	
		1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55	
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62	
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.73	0.81	0.76	0.72	0.78	0.74	0.71	0.67	
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.77	0.84	0.79	0.76	0.81	0.77	0.74	0.71	
		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76	
光源形式		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76	
CE402NB-J14		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.79	
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84	
2,100 lm		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88	


器具効率 Ft= 100%
 上方光束 Fu= 3.5%
 下方光束 Fd= 96.5%

最大取付間隔
 A-A 1.30 H
 B-B 1.28 H

保守率	良	0.88
	中	0.86
	否	0.81

	光度 (cd/1000 lm)		
	A-0	B-B	C-0
0	310	310	310
10	303	307	306
20	289	289	290
30	268	265	267
40	237	232	234
50	198	187	194
60	156	140	150
70	114	88	102
80	70	32	56
90	44	1	28
100	25		15
110	17		6
120	6		
130			
140			
150			
160			
170			
180			

単体照度分布(初期値)

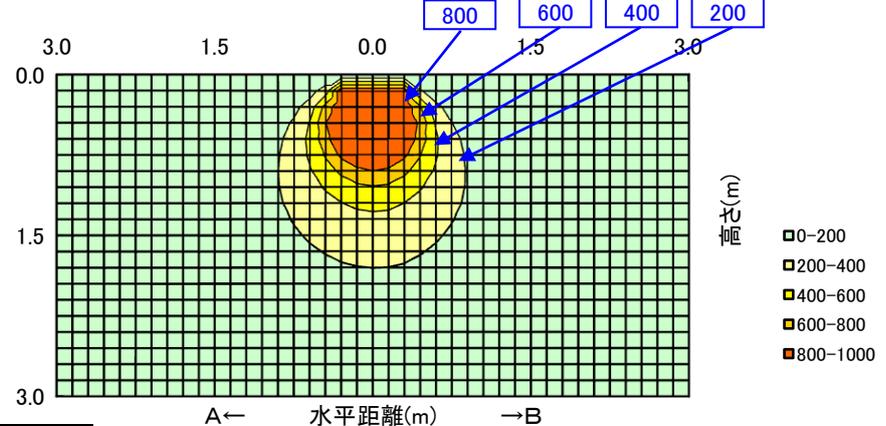

配光曲線

