



日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NC4A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36	
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43	
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.56	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.59	0.69	0.63	0.58	0.67	0.62	0.57	0.54	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62	
	2.5	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.75	0.72	0.77	0.73	0.70	0.67	
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70	
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75	
光源形式 CE403NA-JX14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.85	0.82	0.79	
器具光束 3,600 lm	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.83	
	10	1.03	1.01	0.99	1.01	1.00	0.98	0.96	0.96	0.95	0.93	0.94	0.92	0.91	0.87	

器具効率 Ft= 100%					
上方光束 Fu= 4.0%					
下方光束 Fd= 96.0%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	307	307	307		
10	303	304	303		
20	290	288	288		
30	264	260	266		
40	237	230	234		
50	193	185	192		
60	153	139	146		
70	114	88	102		
80	72	33	57		
90	43	2	28		
100	29	1	17		
110	18	1	7		
120	6				
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

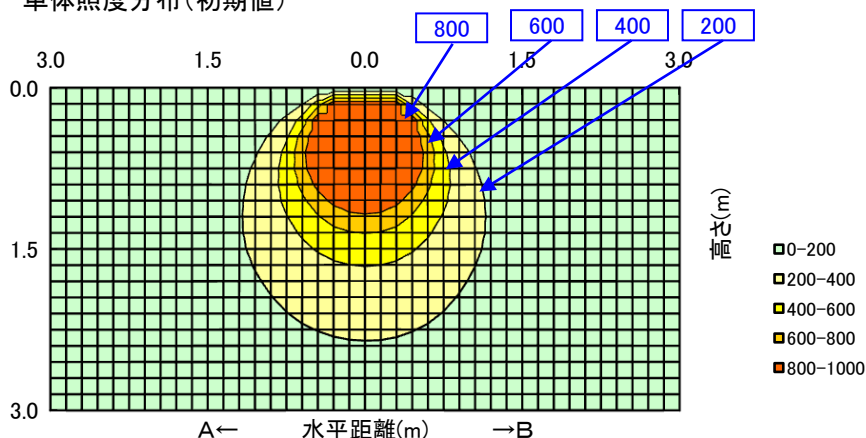

単位: 照度 (lx)

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

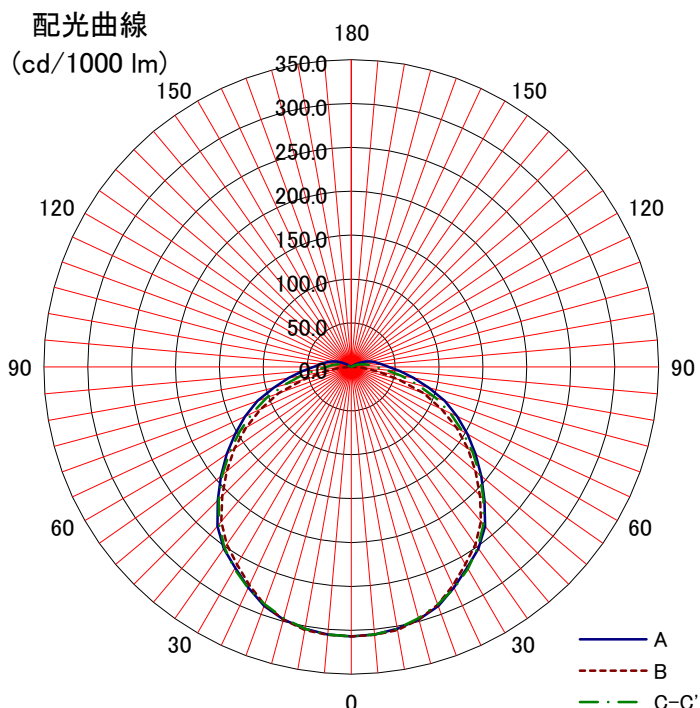

単位: 照度 (cd/1000 lm)

A
B
C-C'