
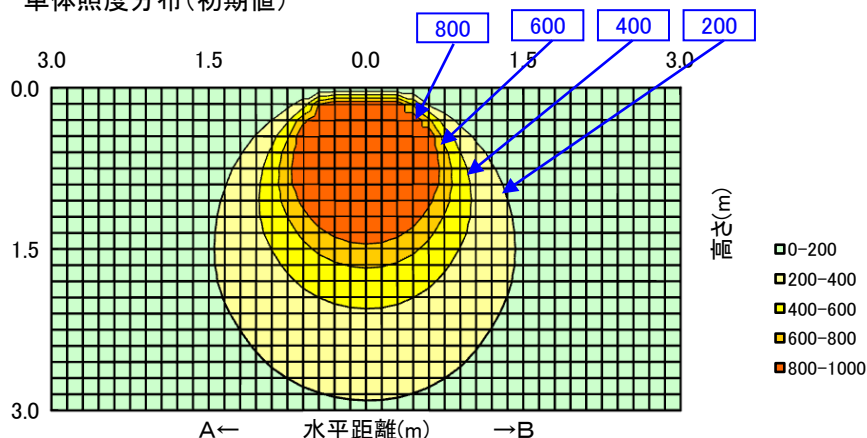
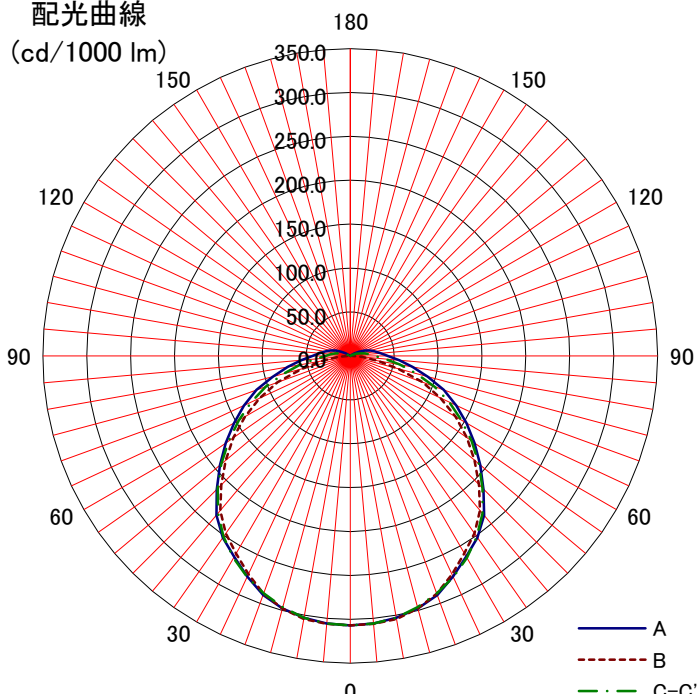


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%													
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%												
				床	10%														0%										
形式: NC4A	室指数	固有照明率 S/H=1.0																											
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28														
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36														
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43														
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.56	0.52	0.49														
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.59	0.69	0.63	0.58	0.67	0.62	0.57	0.54														
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62														
	2.5	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.75	0.72	0.77	0.73	0.70	0.67														
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70														
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75														
光源形式	4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75														
CE405NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.85	0.82	0.79														
器具光束	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.83														
5,500 lm	10	1.03	1.01	0.99	1.01	1.00	0.98	0.96	0.96	0.95	0.93	0.94	0.92	0.91	0.87														
器具効率 Ft= 100%		単体照度分布(初期値) 																											
上方光束 Fu= 4.0%																													
下方光束 Fd= 96.0%																													
最大取付間隔																													
A-A 1.30 H																													
B-B 1.28 H																													
保守率	良	0.88	配光曲線 (cd/1000 lm) 																										
	中	0.86																											
	否	0.81																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	307	307															307												
10	303	304	303																										
20	290	288	288																										
30	264	260	266																										
40	237	230	234																										
50	193	185	192																										
60	153	139	146																										
70	114	88	102																										
80	72	33	57																										
90	43	2	28																										
100	29	1	17																										
110	18	1	7																										
120	6																												
130																													
140																													
150																													
160																													
170																													
180																													