
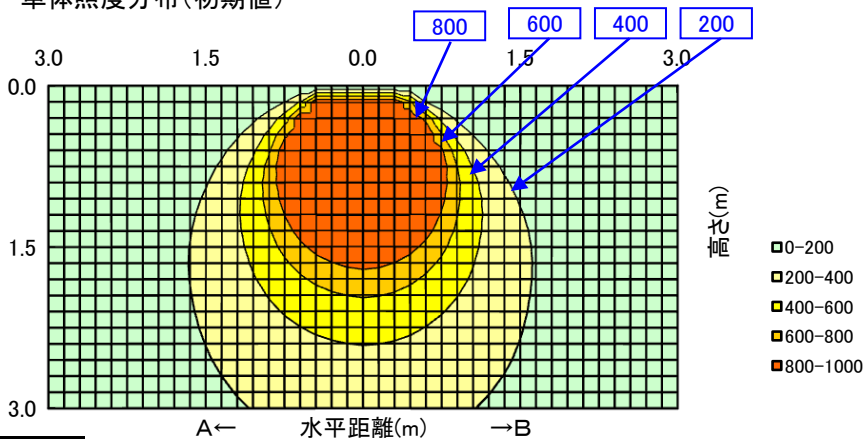
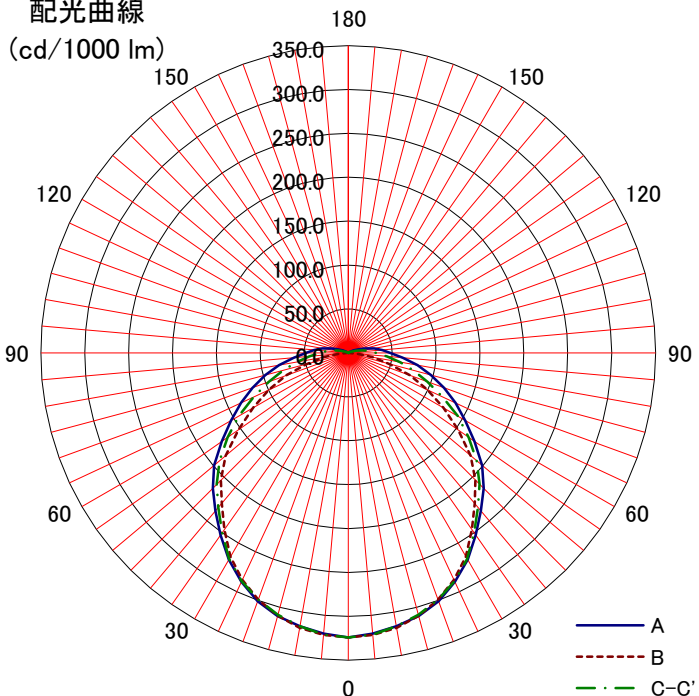


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
形式: NC4A	室指数	床	10%													
固有照明率 S/H=1.0		室指数														
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.31	0.29	
	0.8	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37	
姿図 	1	0.72	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43	
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.62	0.57	0.53	0.50	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62	
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67	
	3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.80	0.77	0.74	0.70	
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.82	0.79	0.75	
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.83	0.79	
CE407NB-JX14	7	1.01	0.98	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.89	0.91	0.89	0.87	0.83	
器具光束	10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.92	0.91	0.87	
7,200 lm																
器具効率 Ft= 100%	単体照度分布(初期値) 															
上方光束 Fu= 4.0%																
下方光束 Fd= 96.0%																
最大取付間隔																
A-A 1.26 H																
B-B 1.24 H																
保守率																
良 0.88																
中 0.86																
否 0.81																
光度 (cd/1000 lm)																
A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 											
0	324	324	324													
10	316	318	316													
20	301	299	299													
30	272	268	271													
40	235	224	230													
50	199	182	191													
60	154	125	144													
70	116	75	96													
80	80	28	60													
90	48	1	32													
100	30	1	17													
110	12	1	4													
120	3	1	1													
130																
140																
150																
160																
170																
180																