


# 日立照明器具 照明特性


| 名称: 交換形LED逆富士形                                                                    | 反射率  | 天井            | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |
|-----------------------------------------------------------------------------------|------|---------------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
|                                                                                   |      | 壁             | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |
|                                                                                   |      | 床             | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    |
| 形式: NC4ACP                                                                        | 室指数  | 固有照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
|                                                                                   |      |               |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
| <備考> キャパシタスイッチ付                                                                   | 0.6  | 0.56          | 0.44 | 0.36 | 0.55 | 0.43 | 0.36 | 0.31 | 0.42 | 0.35 | 0.30 | 0.41 | 0.35 | 0.30 | 0.28 |    |
|                                                                                   | 0.8  | 0.66          | 0.54 | 0.46 | 0.64 | 0.53 | 0.46 | 0.40 | 0.51 | 0.45 | 0.40 | 0.50 | 0.44 | 0.39 | 0.37 |    |
|  | 1    | 0.72          | 0.61 | 0.53 | 0.70 | 0.60 | 0.53 | 0.47 | 0.58 | 0.51 | 0.46 | 0.56 | 0.50 | 0.46 | 0.43 |    |
|                                                                                   | 1.25 | 0.78          | 0.68 | 0.60 | 0.76 | 0.67 | 0.60 | 0.54 | 0.64 | 0.58 | 0.53 | 0.62 | 0.57 | 0.52 | 0.49 |    |
|                                                                                   | 1.5  | 0.82          | 0.73 | 0.66 | 0.80 | 0.72 | 0.65 | 0.60 | 0.69 | 0.64 | 0.59 | 0.67 | 0.62 | 0.58 | 0.55 |    |
|                                                                                   | 2    | 0.88          | 0.80 | 0.74 | 0.86 | 0.79 | 0.73 | 0.68 | 0.76 | 0.71 | 0.67 | 0.74 | 0.69 | 0.66 | 0.62 |    |
|                                                                                   | 2.5  | 0.92          | 0.85 | 0.79 | 0.90 | 0.83 | 0.78 | 0.73 | 0.81 | 0.76 | 0.72 | 0.78 | 0.74 | 0.71 | 0.67 |    |
|                                                                                   | 3    | 0.94          | 0.88 | 0.83 | 0.92 | 0.86 | 0.82 | 0.77 | 0.84 | 0.79 | 0.76 | 0.81 | 0.77 | 0.74 | 0.71 |    |
|                                                                                   | 4    | 0.97          | 0.92 | 0.88 | 0.95 | 0.91 | 0.87 | 0.83 | 0.88 | 0.84 | 0.81 | 0.85 | 0.82 | 0.79 | 0.76 |    |
| 光源形式<br>CE402NA-J14                                                               | 5    | 0.99          | 0.95 | 0.91 | 0.97 | 0.94 | 0.90 | 0.87 | 0.91 | 0.88 | 0.85 | 0.88 | 0.85 | 0.83 | 0.79 |    |
| 器具光束<br>2,750 lm                                                                  | 7    | 1.02          | 0.99 | 0.96 | 1.00 | 0.97 | 0.95 | 0.92 | 0.94 | 0.92 | 0.90 | 0.91 | 0.89 | 0.88 | 0.84 |    |
|                                                                                   | 10   | 1.04          | 1.02 | 1.00 | 1.02 | 1.00 | 0.98 | 0.96 | 0.97 | 0.95 | 0.94 | 0.94 | 0.93 | 0.92 | 0.88 |    |

器具効率 Ft= 100%  
 上方光束 Fu= 3.5%  
 下方光束 Fd= 96.5%

| 最大取付間隔 |      |      |
|--------|------|------|
| A-A    | 1.30 | H    |
| B-B    | 1.28 | H    |
| 保守率    | 良    | 0.88 |
|        | 中    | 0.86 |
|        | 否    | 0.81 |

| 光度 (cd/1000 lm) |     |     |     |      |      |
|-----------------|-----|-----|-----|------|------|
|                 | A-0 | B-B | C-0 | A'-0 | C'-0 |
| 0               | 310 | 310 | 310 |      |      |
| 10              | 303 | 307 | 306 |      |      |
| 20              | 289 | 289 | 290 |      |      |
| 30              | 268 | 265 | 267 |      |      |
| 40              | 237 | 232 | 234 |      |      |
| 50              | 198 | 187 | 194 |      |      |
| 60              | 156 | 140 | 150 |      |      |
| 70              | 114 | 88  | 102 |      |      |
| 80              | 70  | 32  | 56  |      |      |
| 90              | 44  | 1   | 28  |      |      |
| 100             | 25  |     | 15  |      |      |
| 110             | 17  |     | 6   |      |      |
| 120             | 6   |     |     |      |      |
| 130             |     |     |     |      |      |
| 140             |     |     |     |      |      |
| 150             |     |     |     |      |      |
| 160             |     |     |     |      |      |
| 170             |     |     |     |      |      |
| 180             |     |     |     |      |      |

単体照度分布 (初期値)

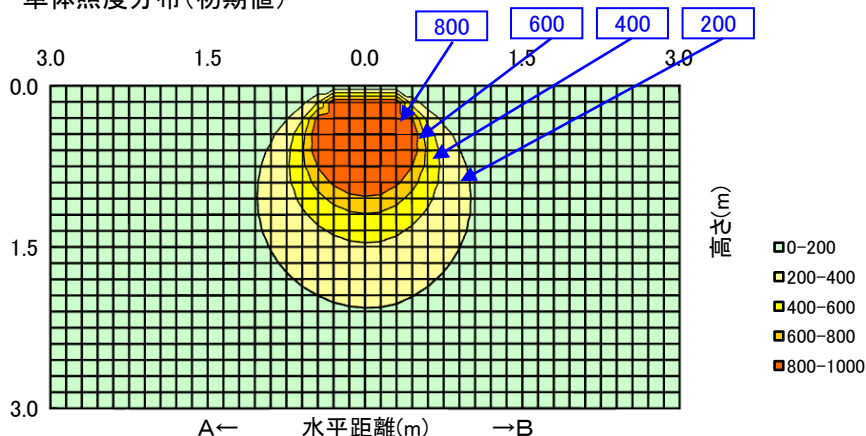

配光曲線  
(cd/1000 lm)

