
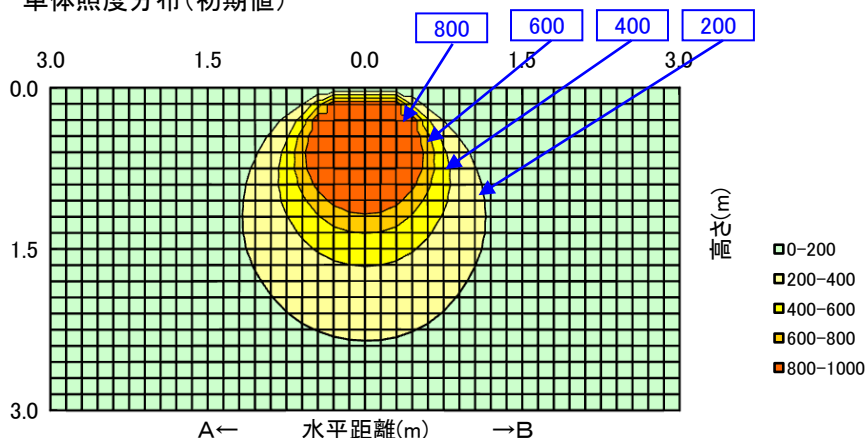
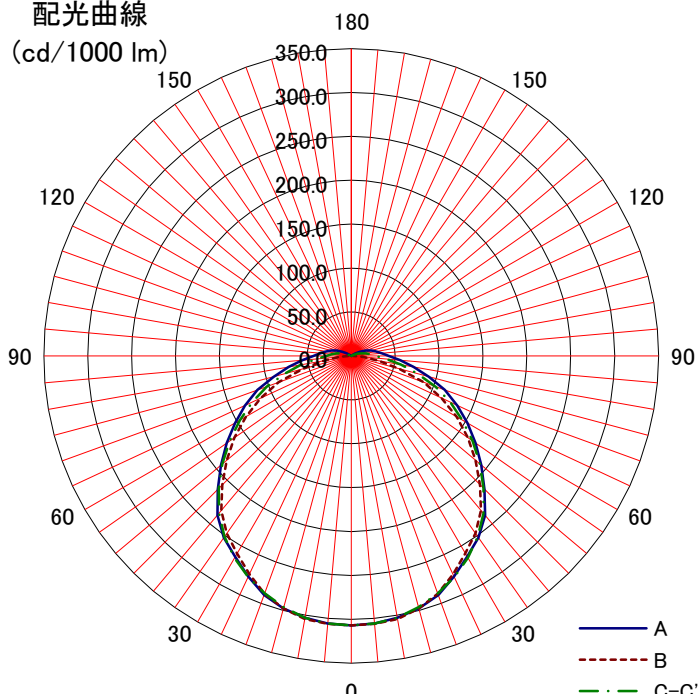


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NC4ACP	室指数	固有照明率 S/H=1.0														
<備考> キャパシタ付	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
	0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36	
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43	
	1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.56	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.59	0.69	0.63	0.58	0.67	0.62	0.57	0.54	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62	
	2.5	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.75	0.72	0.77	0.73	0.70	0.67	
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70	
	4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75	
光源形式 CE403NA-JX14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.85	0.82	0.79	
器具光束 3,600 lm	7	1.01	0.98	0.95	0.99	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.83	
	10	1.03	1.01	0.99	1.01	1.00	0.98	0.96	0.96	0.95	0.93	0.94	0.92	0.91	0.87	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 4.0%																
下方光束 Fd= 96.0%																
最大取付間隔																
A-A 1.30 H																
B-B 1.28 H																
保守率	良	0.88														
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	307	307	307													
10	303	304	303													
20	290	288	288													
30	264	260	266													
40	237	230	234													
50	193	185	192													
60	153	139	146													
70	114	88	102													
80	72	33	57													
90	43	2	28													
100	29	1	17													
110	18	1	7													
120	6															
130																
140																
150																
160																
170																
180																