
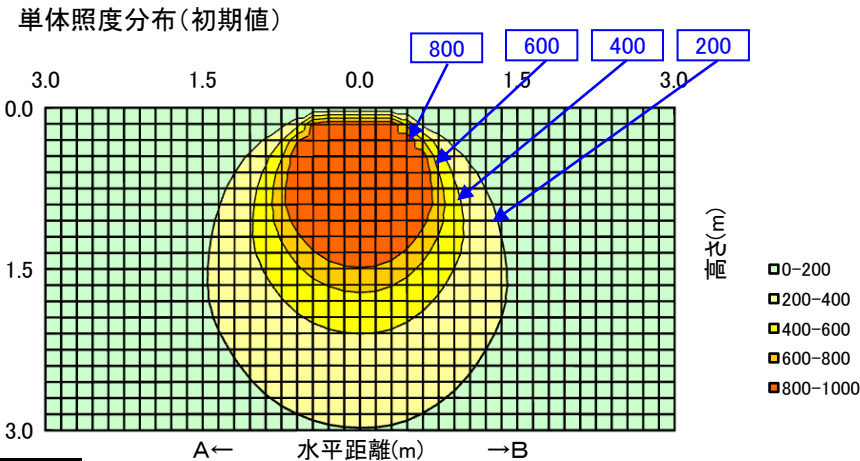
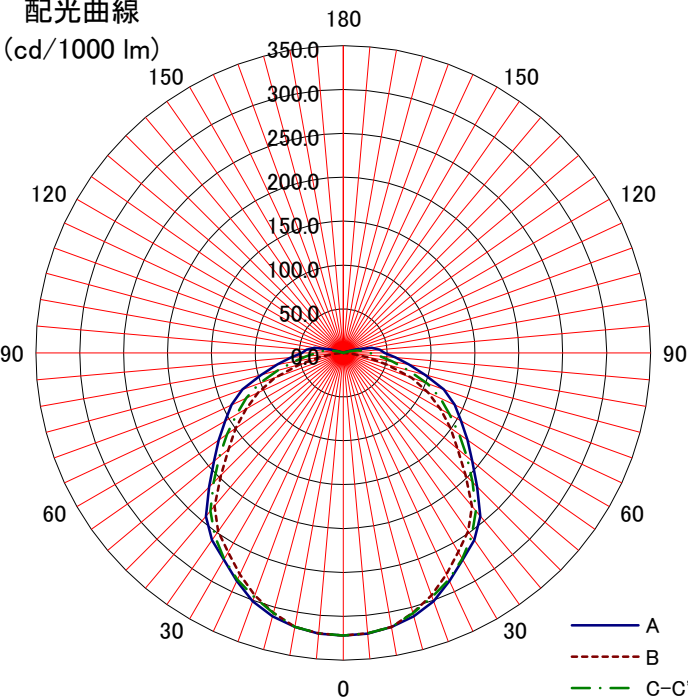


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%														0%
形式: NC4ACP	反射率	固有照明率 S/H=1.0																
室指数	0.6	0.56	0.44	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28			
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37			
姿図	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43			
	1.25	0.77	0.67	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49			
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58	0.55			
	2	0.87	0.80	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62			
	2.5	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.67			
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70			
	4	0.96	0.91	0.87	0.94	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.79	0.75			
光源形式	5	0.98	0.94	0.90	0.96	0.93	0.89	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.79			
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.94	0.91	0.93	0.91	0.89	0.90	0.89	0.87	0.83			
5,500 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.95	0.93	0.93	0.92	0.91	0.87			
器具効率 Ft= 100%		単体照度分布(初期値)																
上方光束 Fu= 3.3%																		
下方光束 Fd= 96.7%																		
最大取付間隔																		
A-A 1.28 H																		
B-B 1.22 H																		
保守率	良	0.88	配光曲線 (cd/1000 lm)															
	中	0.86																
	否	0.81																
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	322															322	322	
10	317															317	317	
20	301															294	296	
30	272															262	271	
40	243															228	235	
50	192															170	184	
60	155															128	140	
70	122															83	102	
80	76															27	57	
90	47															1	30	
100	33															1	17	
110	4																	
120																		
130																		
140																		
150																		
160																		
170																		
180																		

単体照度分布 (初期値)

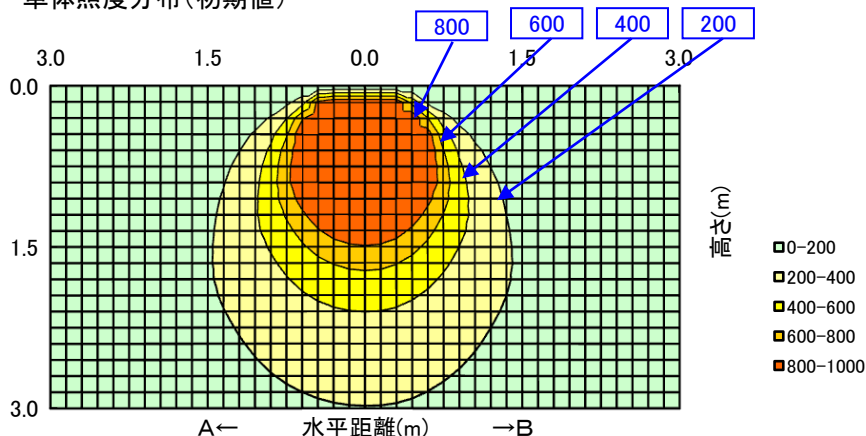

配光曲線

