


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: NC4ACP	室指数	固有照明率 S/H=1.0															
<備考> キャパシタ付	0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.31	0.29		
	0.8	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37		
姿図 	1	0.72	0.61	0.54	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43		
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.62	0.57	0.53	0.50		
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55		
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62		
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67		
	3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.80	0.77	0.74	0.70		
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.82	0.79	0.75		
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.83	0.79		
CE407NB-JX14	7	1.01	0.98	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.89	0.91	0.89	0.87	0.83		
器具光束	10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.92	0.91	0.87		
7,200 lm																	

器具効率 Ft= 100%					
上方光束 Fu= 4.0%					
下方光束 Fd= 96.0%					
最大取付間隔					
A-A		1.26 H			
B-B		1.24 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	324	324	324		
10	316	318	316		
20	301	299	299		
30	272	268	271		
40	235	224	230		
50	199	182	191		
60	154	125	144		
70	116	75	96		
80	80	28	60		
90	48	1	32		
100	30	1	17		
110	12	1	4		
120	3	1	1		
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

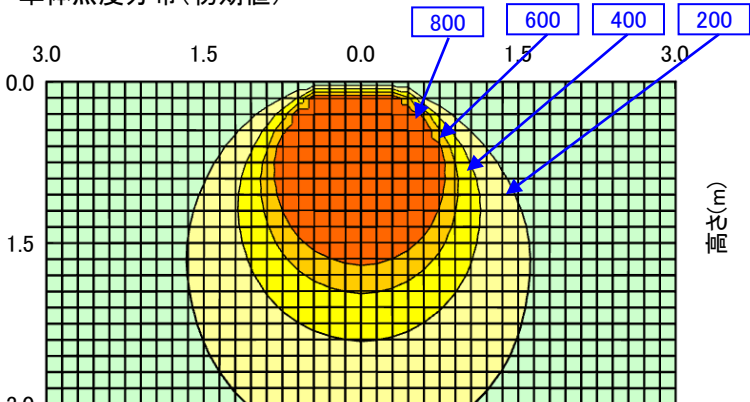

0-200
200-400
400-600
600-800
800-1000

水平距離(m)

配光曲線
(cd/1000 lm)

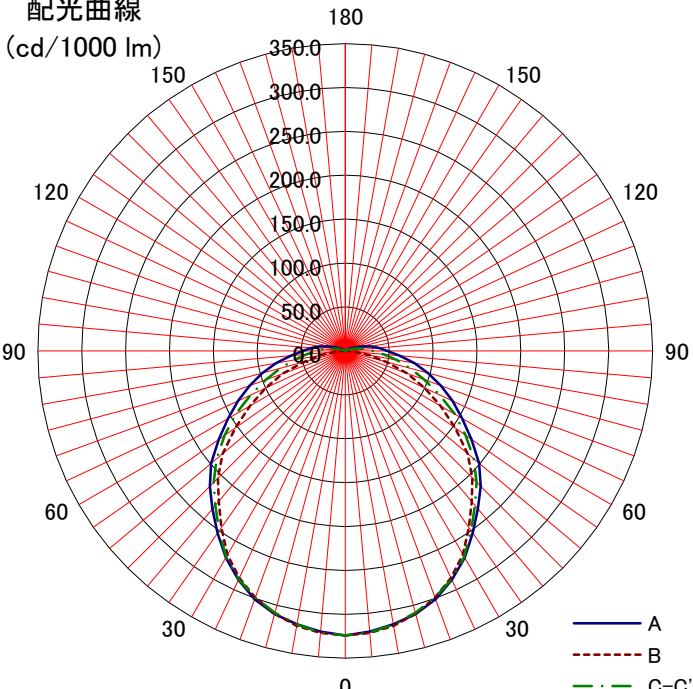

A
B
C-C'