
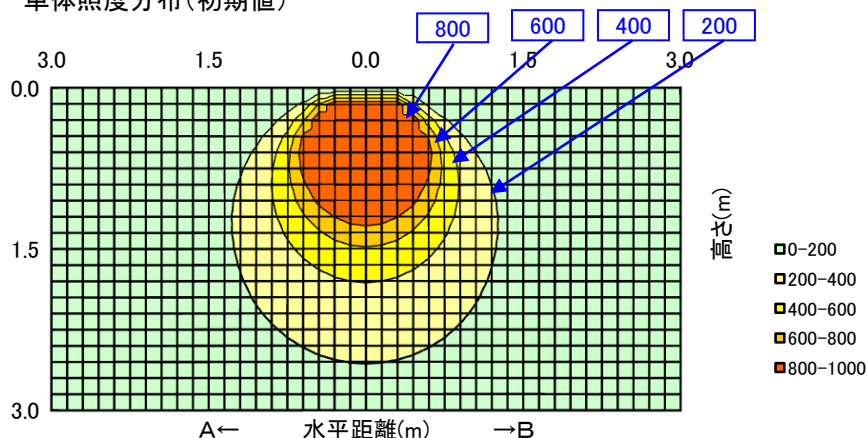
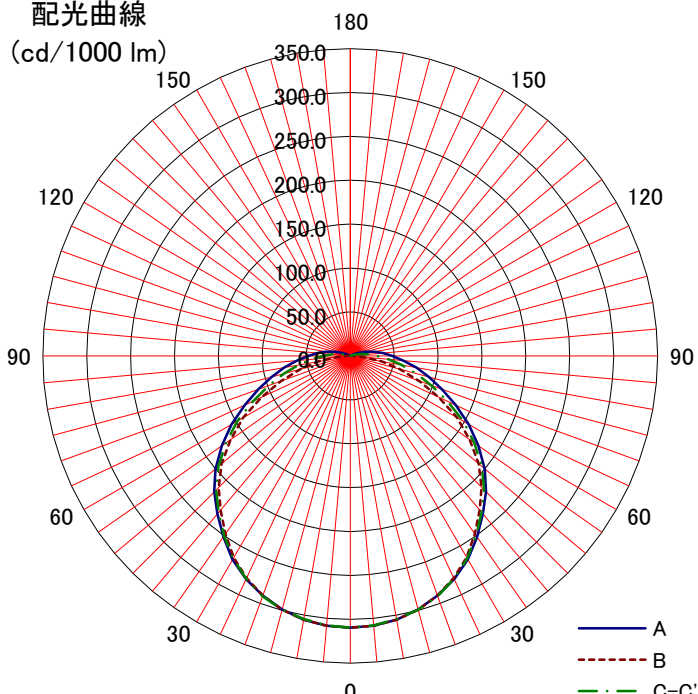


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%													0%
形式: NC4B	反射率	固有照明率 S/H=1.0															
<備考>	室指数																
		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28	
姿図		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
		1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49	
		1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55	
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62	
		2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67	
		3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.74	0.71	
光源形式	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76		
CE404NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.88	0.85	0.88	0.85	0.83	0.79		
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84		
4,250 lm	10	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 3.2%																	
下方光束 Fd= 96.8%																	
最大取付間隔		配光曲線 															
A-A 1.30 H																	
B-B 1.28 H																	
保守率	良																0.88
	中																0.86
	否	0.81															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	310	310	310														
10	305	305	304														
20	291	291	291														
30	268	265	266														
40	235	229	233														
50	200	191	196														
60	156	140	149														
70	111	84	99														
80	76	36	59														
90	48	3	30														
100	28	1	14														
110	11	1	1														
120																	
130																	
140																	
150																	
160																	
170																	
180																	