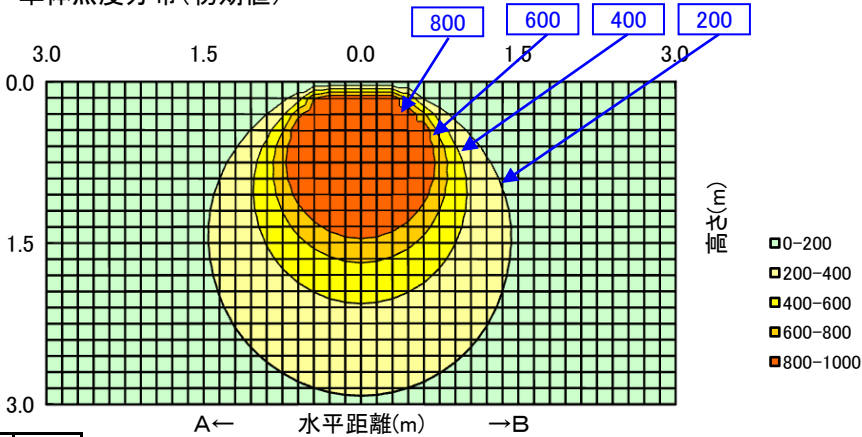
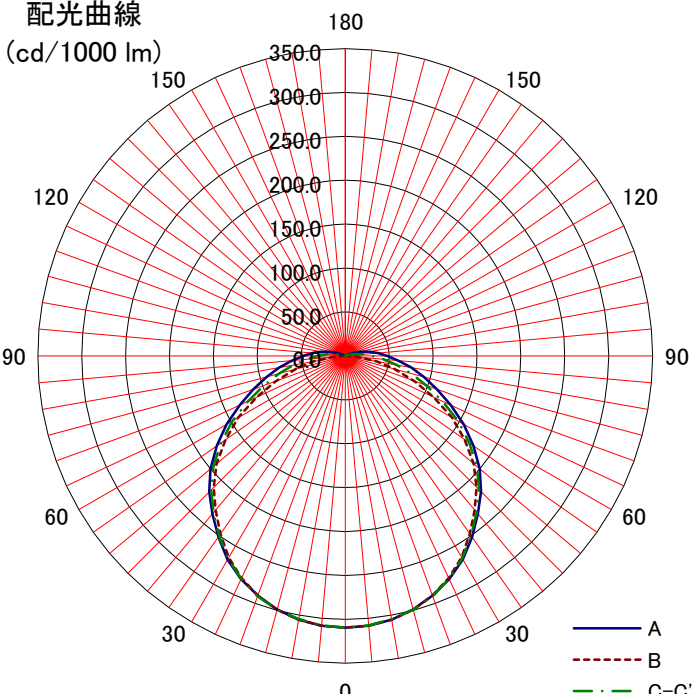


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%		
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: NC4B	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28		
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37		
姿図	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43		
	1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49		
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55		
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62		
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67		
	3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.74	0.71		
	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76		
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.88	0.85	0.88	0.85	0.83	0.79		
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84		
5,500 lm	10	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88		
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000															
上方光束 Fu= 3.2%																	
下方光束 Fd= 96.8%																	
最大取付間隔																	
A-A 1.30 H																	
B-B 1.28 H																	
保守率	良															0.88	
	中															0.86	
	否															0.81	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'															
	A-0															B-B	C-0
0	310															310	310
10	305															305	304
20	291															291	291
30	268															265	266
40	235															229	233
50	200															191	196
60	156															140	149
70	111															84	99
80	76	36	59														
90	48	3	30														
100	28	1	14														
110	11	1	1														
120																	
130																	
140																	
150																	
160																	
170																	
180																	