
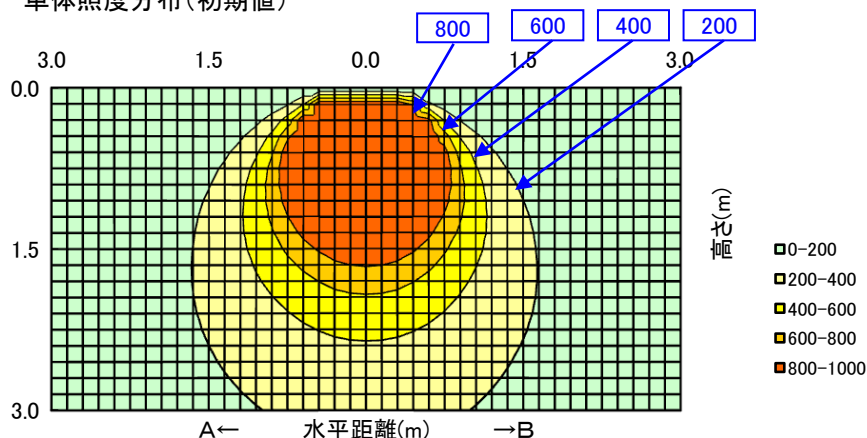
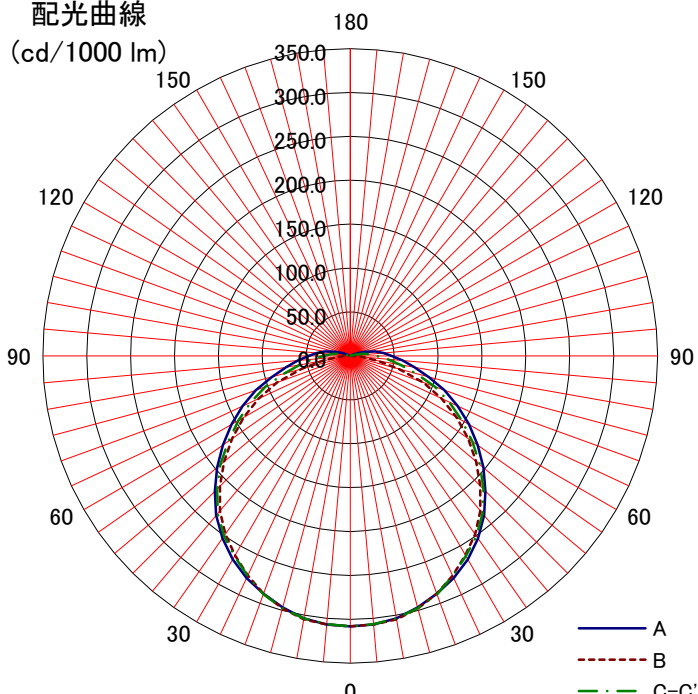


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
																	床
形式: NC4B	反射率	固有照明率 S/H=1.0															
<備考>	室指数	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
		0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.50	0.44	0.39	0.36	
姿図		1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43	
		1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49	
		1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.55	
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62	
		2.5	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67	
		3	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70	
		4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.85	0.82	0.79	0.76	
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.83	0.79		
器具光束	7	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.87	0.84		
7,200 lm	10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.91	0.88		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 3.5%																	
下方光束 Fd= 96.5%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.30 H																	
B-B 1.28 H																	
保守率																	
良	0.88																
中	0.86																
否	0.81																
光度 (cd/1000 lm)																	
	A-0															B-B	C-0
0	308	308	308														
10	304	305	304														
20	288	288	289														
30	268	262	263														
40	237	231	234														
50	198	187	193														
60	156	140	147														
70	114	89	103														
80	74	33	58														
90	47	2	30														
100	29	1	15														
110	9	1	1														
120																	
130																	
140																	
150																	
160																	
170																	
180																	