
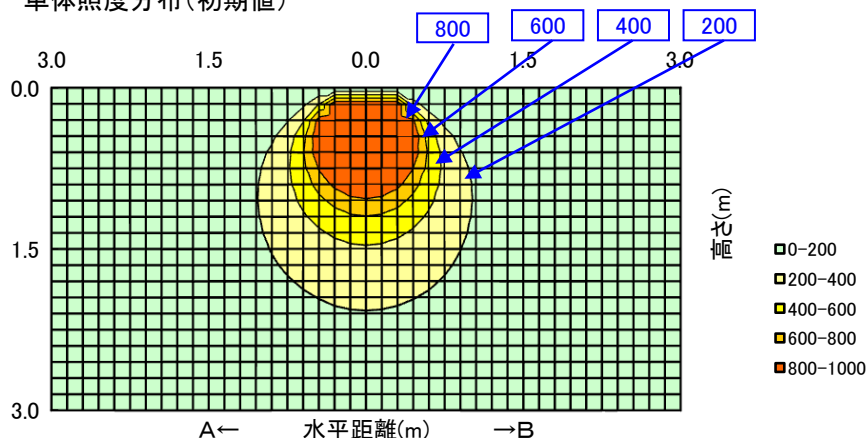
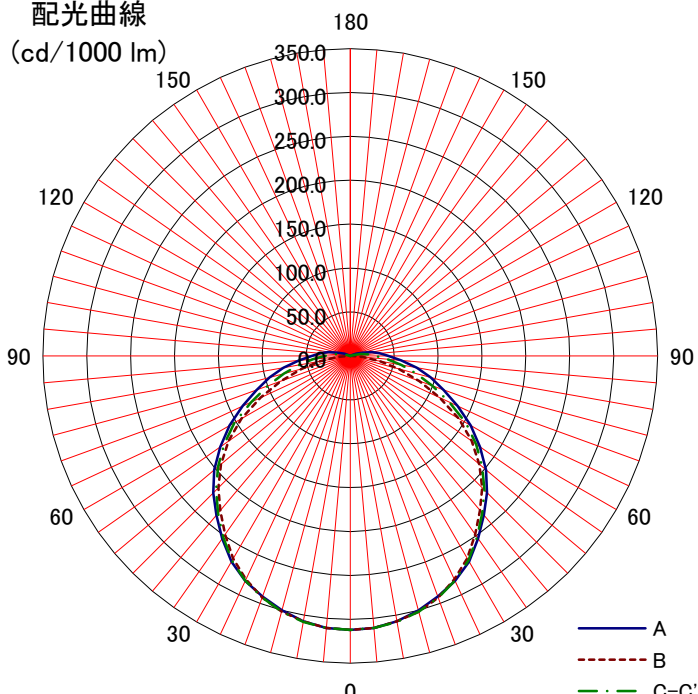


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%																																																																																																																								
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
			床	10%														0%																																																																																																																						
形式: NC4BCP	室指数	固有照明率 S/H=1.0																																																																																																																																						
〈備考〉キャノースイッチ付		0.6	0.57	0.44	0.36	0.55	0.44	0.36	0.31	0.42	0.35	0.31	0.41	0.35	0.30	0.28																																																																																																																								
姿図		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37																																																																																																																								
		1	0.72	0.61	0.53	0.71	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.51	0.46	0.43																																																																																																																								
		1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50																																																																																																																								
		1.5	0.83	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.62	0.58	0.55																																																																																																																								
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.71	0.67	0.74	0.70	0.66	0.63																																																																																																																								
		2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68																																																																																																																								
		3	0.94	0.88	0.83	0.92	0.87	0.82	0.77	0.84	0.80	0.76	0.81	0.78	0.75	0.71																																																																																																																								
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.85	0.81	0.85	0.82	0.80	0.76																																																																																																																									
CE402NA-J14	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.86	0.83	0.80																																																																																																																									
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.88	0.85																																																																																																																									
2,750 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.97	0.97	0.96	0.94	0.95	0.93	0.92	0.89																																																																																																																									
器具効率 Ft= 100%		単体照度分布 (初期値) 																																																																																																																																						
上方光束 Fu= 2.8%																																																																																																																																								
下方光束 Fd= 97.2%																																																																																																																																								
最大取付間隔		配光曲線 																																																																																																																																						
A-A 1.30 H																																																																																																																																								
B-B 1.28 H																																																																																																																																								
保守率	良																0.88																																																																																																																							
	中																0.86																																																																																																																							
	否																0.81																																																																																																																							
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>312</td><td>312</td><td>312</td><td></td><td></td></tr><tr><td>10</td><td>307</td><td>307</td><td>308</td><td></td><td></td></tr><tr><td>20</td><td>292</td><td>293</td><td>293</td><td></td><td></td></tr><tr><td>30</td><td>271</td><td>266</td><td>269</td><td></td><td></td></tr><tr><td>40</td><td>237</td><td>230</td><td>234</td><td></td><td></td></tr><tr><td>50</td><td>202</td><td>192</td><td>196</td><td></td><td></td></tr><tr><td>60</td><td>158</td><td>143</td><td>152</td><td></td><td></td></tr><tr><td>70</td><td>114</td><td>84</td><td>100</td><td></td><td></td></tr><tr><td>80</td><td>77</td><td>35</td><td>59</td><td></td><td></td></tr><tr><td>90</td><td>43</td><td>1</td><td>29</td><td></td><td></td></tr><tr><td>100</td><td>25</td><td></td><td>12</td><td></td><td></td></tr><tr><td>110</td><td>7</td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	312	312	312			10	307	307	308			20	292	293	293			30	271	266	269			40	237	230	234			50	202	192	196			60	158	143	152			70	114	84	100			80	77	35	59			90	43	1	29			100	25		12			110	7					120						130						140						150						160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	312	312	312																																																																																																																																					
10	307	307	308																																																																																																																																					
20	292	293	293																																																																																																																																					
30	271	266	269																																																																																																																																					
40	237	230	234																																																																																																																																					
50	202	192	196																																																																																																																																					
60	158	143	152																																																																																																																																					
70	114	84	100																																																																																																																																					
80	77	35	59																																																																																																																																					
90	43	1	29																																																																																																																																					
100	25		12																																																																																																																																					
110	7																																																																																																																																							
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								