


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NC4BCP	室指数	固有照明率 S/H=1.0														
<備考> キャパシタ付	0.6	0.57	0.44	0.36	0.55	0.44	0.36	0.31	0.42	0.35	0.31	0.41	0.35	0.30	0.28	
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37	
姿図	1	0.72	0.61	0.53	0.71	0.60	0.53	0.47	0.58	0.52	0.46	0.56	0.51	0.46	0.43	
	1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50	
	1.5	0.83	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.62	0.58	0.55	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.71	0.67	0.74	0.70	0.66	0.63	
	2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68	
	3	0.94	0.88	0.83	0.92	0.87	0.82	0.77	0.84	0.80	0.76	0.81	0.78	0.75	0.71	
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.85	0.81	0.85	0.82	0.80	0.76	
光源形式	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.86	0.83	0.80	
CE402NB-J14	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.88	0.85	
器具光束	10	1.04	1.02	1.00	1.02	1.00	0.98	0.97	0.97	0.96	0.94	0.95	0.93	0.92	0.89	
2,100 lm																

器具効率 Ft= 100%					
上方光束 Fu= 2.8%					
下方光束 Fd= 97.2%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	312	312	312		
10	307	307	308		
20	292	293	293		
30	271	266	269		
40	237	230	234		
50	202	192	196		
60	158	143	152		
70	114	84	100		
80	77	35	59		
90	43	1	29		
100	25		12		
110	7				
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

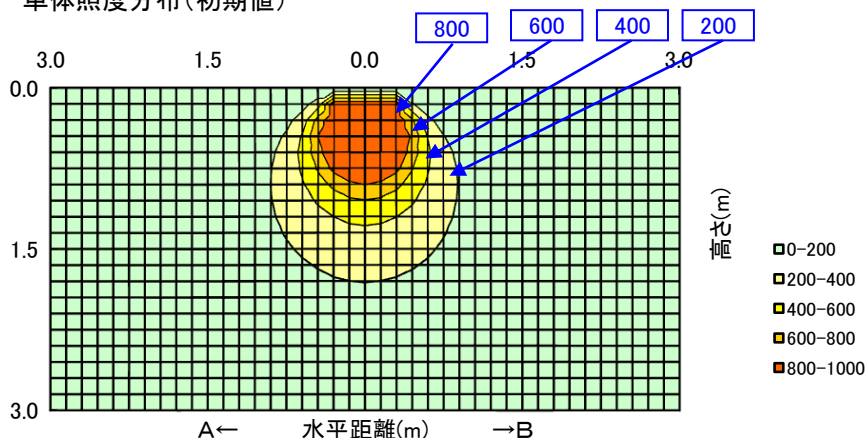


0-200
200-400
400-600
600-800
800-1000

3.0 1.5 0.0 1.5 3.0

0.0 1.5 3.0

A← 水平距離(m) →B

配光曲線 (cd/1000 lm)

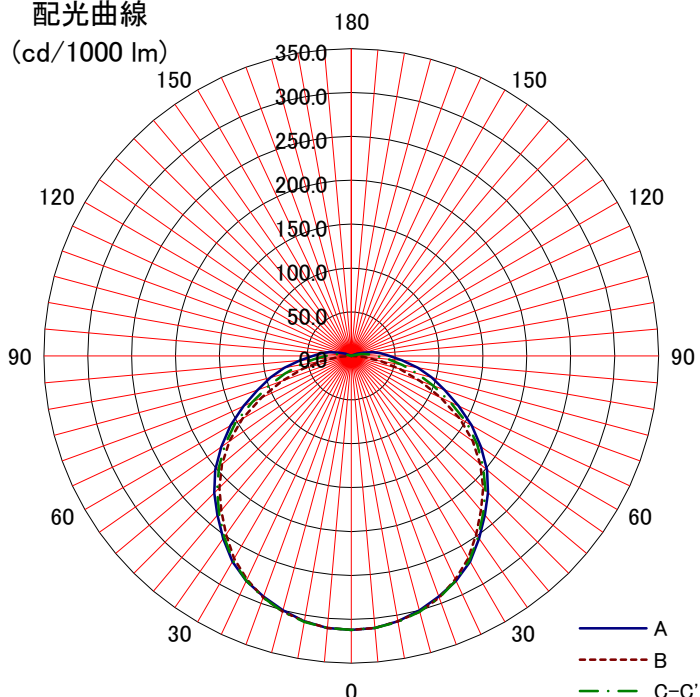

180 150 120 90 60 30 0

350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'