



日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NC4BCP	室指数	固有照明率 S/H=1.0														
<備考> キャパシタ付		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28
姿図 	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
	1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49	
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62	
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67	
	3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.74	0.71	
光源形式	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76	
CE404NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.88	0.85	0.88	0.85	0.83	0.79	
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84	
4,250 lm	10	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88	

器具効率 Ft= 100%					
上方光束 Fu= 3.2%					
下方光束 Fd= 96.8%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.88			
	中	0.86			
	否	0.81			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	310	310	310		
10	305	305	304		
20	291	291	291		
30	268	265	266		
40	235	229	233		
50	200	191	196		
60	156	140	149		
70	111	84	99		
80	76	36	59		
90	48	3	30		
100	28	1	14		
110	11	1	1		
120					
130					
140					
150					
160					
170					
180					


単体照度分布 (初期値)

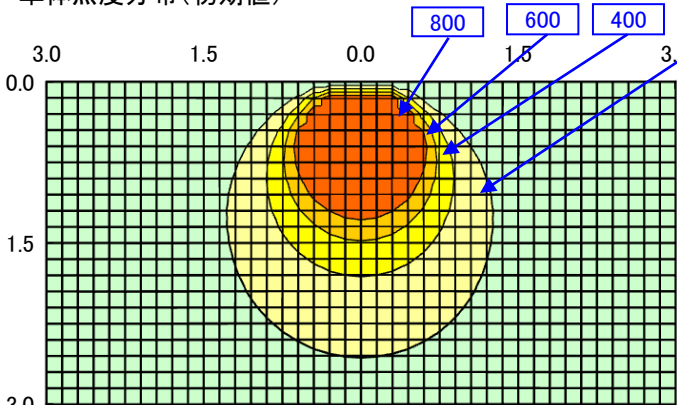

単位: 照度 (lx)

0-200
200-400
400-600
600-800
800-1000


配光曲線 (cd/1000 lm)

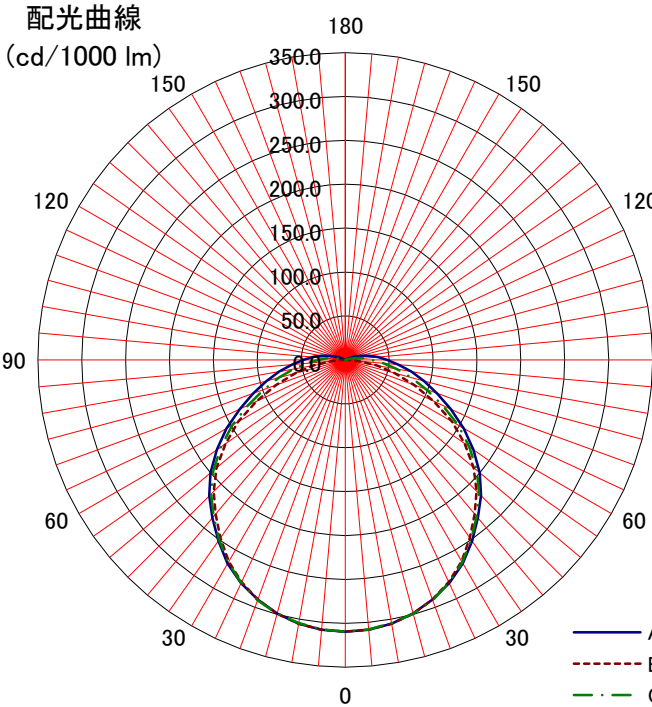

単位: 照度 (lx)

A
B
C-C'

単体照度分布 (初期値)

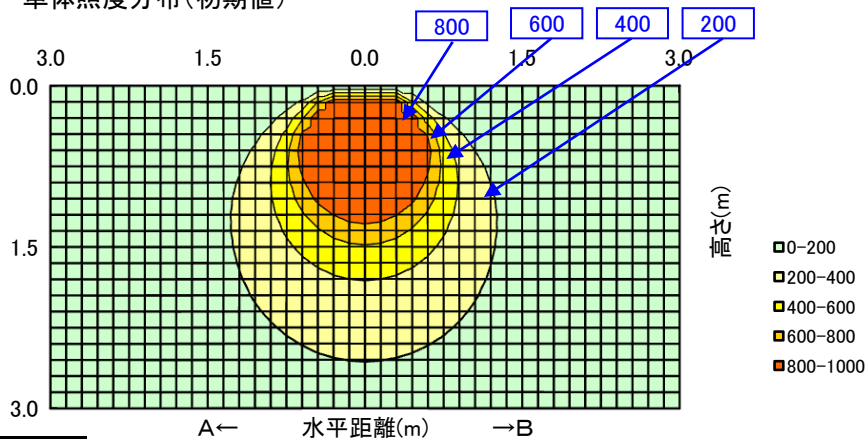

配光曲線

(cd/1000 lm)

