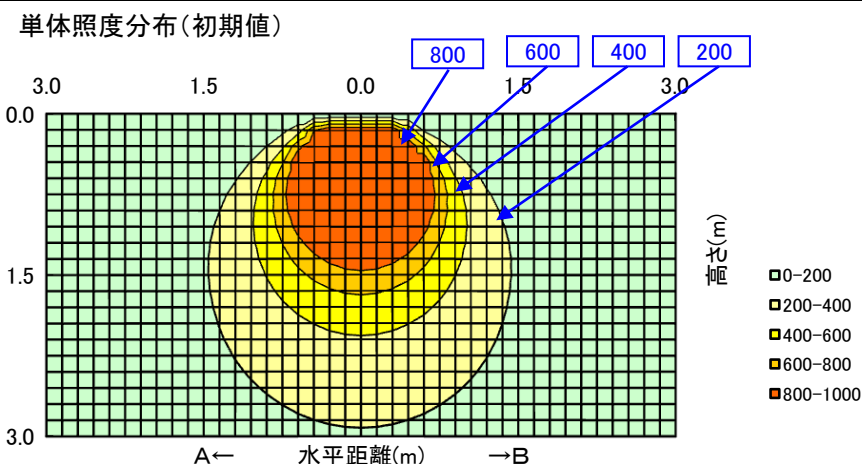
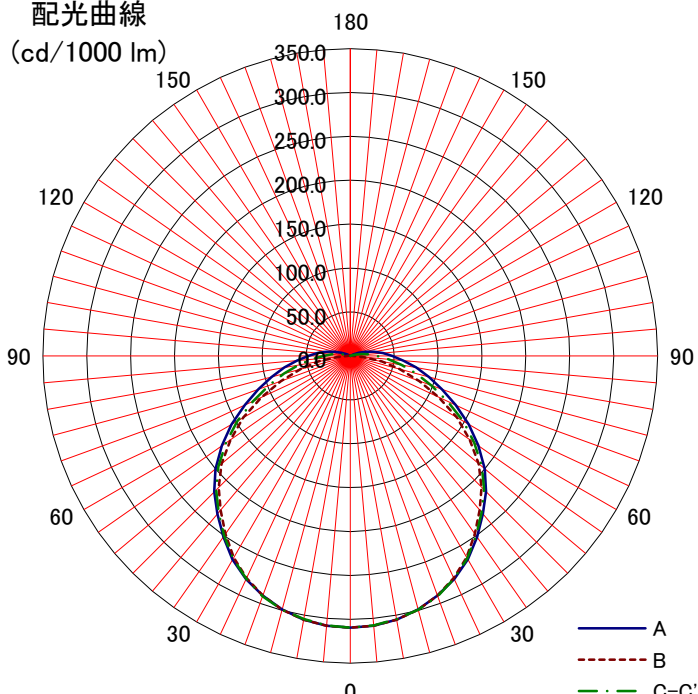


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%															
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%														
				床	10%														0%												
	形式: NC4BCP	室指数	固有照明率 S/H=1.0																												
＜備考＞キャビースイッチ付	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.35	0.30	0.28																
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37																
	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43																
	1.25	0.78	0.68	0.60	0.76	0.67	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49																
	1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.64	0.59	0.67	0.62	0.58	0.55																
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.69	0.66	0.62																
	2.5	0.91	0.85	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.78	0.74	0.70	0.67																
	3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.74	0.71																
光源形式	4	0.97	0.92	0.88	0.95	0.90	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76																
	CE405NA-J14	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.88	0.85	0.88	0.85	0.83	0.79															
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84																
	5,500 lm	10	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88															
器具効率 Ft= 100%		単体照度分布(初期値) 																													
上方光束 Fu= 3.2%																															
下方光束 Fd= 96.8%																															
最大取付間隔																															
A-A 1.30 H																															
B-B 1.28 H																															
保守率	良																0.88														
	中																0.86														
	否																0.81														
光度 (cd/1000 lm)																	配光曲線 (cd/1000 lm) 														
	A-0																														
0	310	310	310																												
10	305	305	304																												
20	291	291	291																												
30	268	265	266																												
40	235	229	233																												
50	200	191	196																												
60	156	140	149																												
70	111	84	99																												
80	76	36	59																												
90	48	3	30																												
100	28	1	14																												
110	11	1	1																												
120																															
130																															
140																															
150																															
160																															
170																															
180																															