

日立照明器具 照明特性


名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NC4BCP	室指数	固有照明率 S/H=1.0														
<備考> キャパシタスイッチ付	0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.31	0.29	
	0.8	0.66	0.55	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37	
姿図 	1	0.72	0.61	0.54	0.71	0.60	0.53	0.47	0.58	0.52	0.47	0.57	0.51	0.46	0.43	
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50	
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55	
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63	
	2.5	0.91	0.85	0.79	0.90	0.83	0.78	0.73	0.81	0.76	0.72	0.78	0.74	0.71	0.67	
	3	0.94	0.88	0.83	0.92	0.86	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.74	0.71	
	4	0.97	0.92	0.88	0.95	0.91	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.76	
光源形式	5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.88	0.85	0.88	0.85	0.83	0.79	
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.89	0.88	0.84	
5,500 lm	10	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88	

器具効率 Ft=	100%
上方光束 Fu=	3.3%
下方光束 Fd=	96.7%

最大取付間隔		
A-A	1.28	H
B-B	1.24	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	325	325	325		
10	319	319	319		
20	302	297	299		
30	276	267	271		
40	241	227	234		
50	199	176	188		
60	158	132	143		
70	119	79	99		
80	80	29	59		
90	52	1	32		
100	32	1	14		
110	6				
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

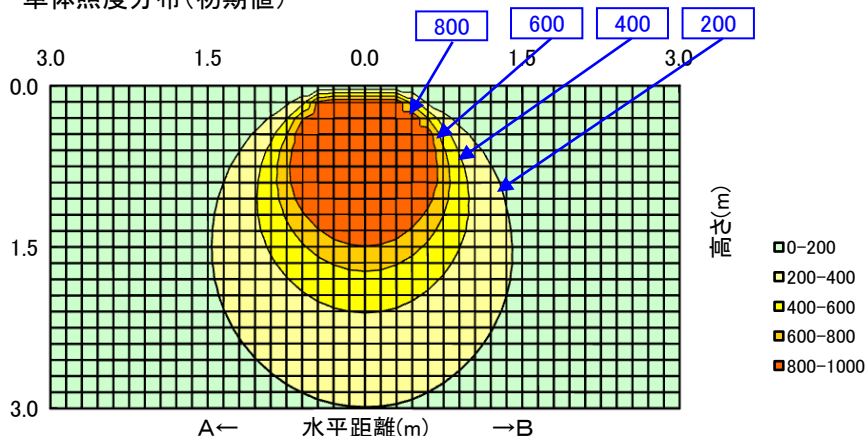

配光曲線
(cd/1000 lm)

