
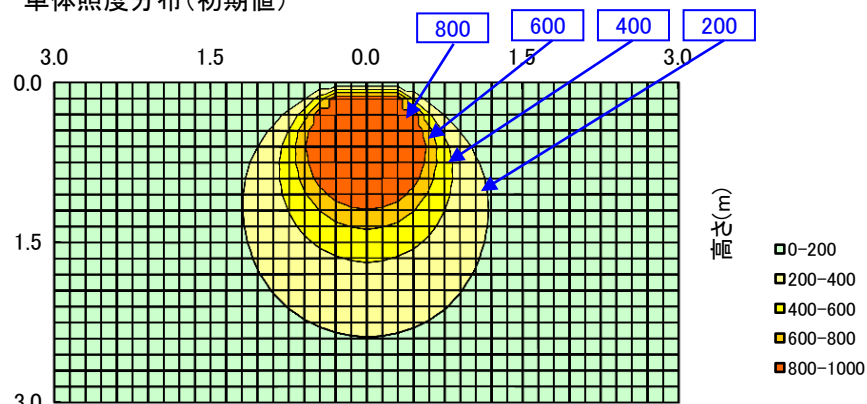
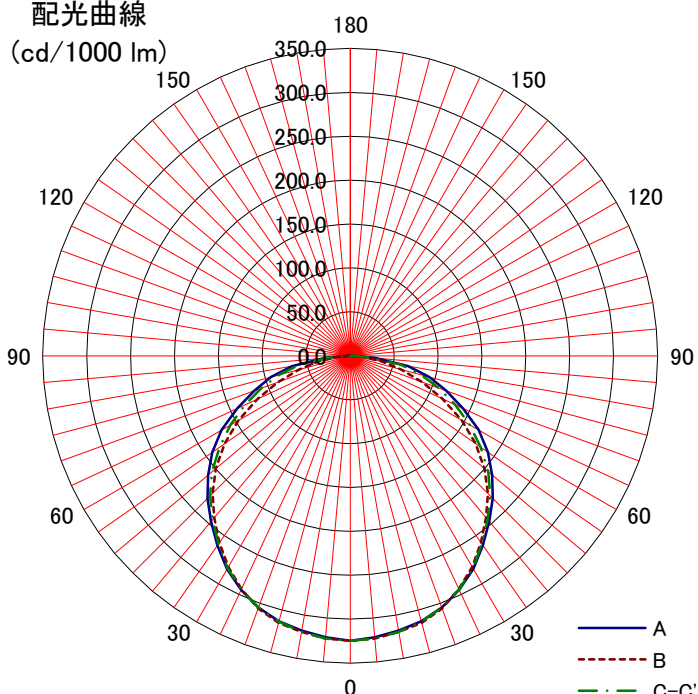


日立照明器具 照明特性

名称: 交換形LED下面開放	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: NC4C	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																																																																																																																								
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.41	0.38																																																																																																																								
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																																																																																																																								
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52																																																																																																																								
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58																																																																																																																								
	2	0.89	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66																																																																																																																								
	2.5	0.92	0.86	0.80	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.80	0.77	0.73	0.71																																																																																																																								
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.83	0.80	0.77	0.74																																																																																																																								
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.82	0.80																																																																																																																								
光源形式 CE403NA-JX14	5	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.87	0.90	0.88	0.86	0.83																																																																																																																								
器具光束 3,510 lm	7	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88																																																																																																																								
	10	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		光度 (cd/1000 lm) <table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>325</td><td>325</td><td>325</td><td></td><td></td></tr><tr><td>10</td><td>318</td><td>319</td><td>319</td><td></td><td></td></tr><tr><td>20</td><td>305</td><td>306</td><td>305</td><td></td><td></td></tr><tr><td>30</td><td>281</td><td>278</td><td>279</td><td></td><td></td></tr><tr><td>40</td><td>246</td><td>241</td><td>243</td><td></td><td></td></tr><tr><td>50</td><td>211</td><td>200</td><td>205</td><td></td><td></td></tr><tr><td>60</td><td>169</td><td>147</td><td>157</td><td></td><td></td></tr><tr><td>70</td><td>116</td><td>87</td><td>107</td><td></td><td></td></tr><tr><td>80</td><td>67</td><td>37</td><td>58</td><td></td><td></td></tr><tr><td>90</td><td>4</td><td>1</td><td>5</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	325	325	325			10	318	319	319			20	305	306	305			30	281	278	279			40	246	241	243			50	211	200	205			60	169	147	157			70	116	87	107			80	67	37	58			90	4	1	5			100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	325															325	325																																																																																																																						
10	318															319	319																																																																																																																						
20	305	306	305																																																																																																																																				
30	281	278	279																																																																																																																																				
40	246	241	243																																																																																																																																				
50	211	200	205																																																																																																																																				
60	169	147	157																																																																																																																																				
70	116	87	107																																																																																																																																				
80	67	37	58																																																																																																																																				
90	4	1	5																																																																																																																																				
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
A-A 1.30 H																																																																																																																																							
B-B 1.28 H																																																																																																																																							
保守率	良	0.86	配光曲線 (cd/1000 lm) 																																																																																																																																				
	中	0.81																																																																																																																																					
	否	0.72																																																																																																																																					