



日立照明器具 照明特性

名称: 交換形LED下面開放	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NC4C	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29	
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.41	0.38	
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45	
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52	
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58	
	2	0.89	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66	
	2.5	0.92	0.86	0.80	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.80	0.77	0.73	0.71	
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.83	0.80	0.77	0.74	
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.82	0.80	
光源形式 CE404NA-J14	5	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.87	0.90	0.88	0.86	0.83	
器具光束 4,140 lm	7	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
	10	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	


器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.30 H			
B-B		1.28 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	325	325	325		
10	318	319	319		
20	305	306	305		
30	281	278	279		
40	246	241	243		
50	211	200	205		
60	169	147	157		
70	116	87	107		
80	67	37	58		
90	4	1	5		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

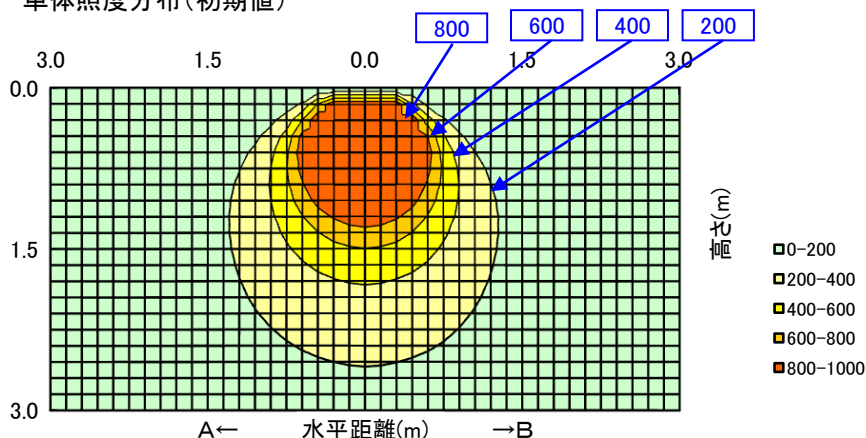

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

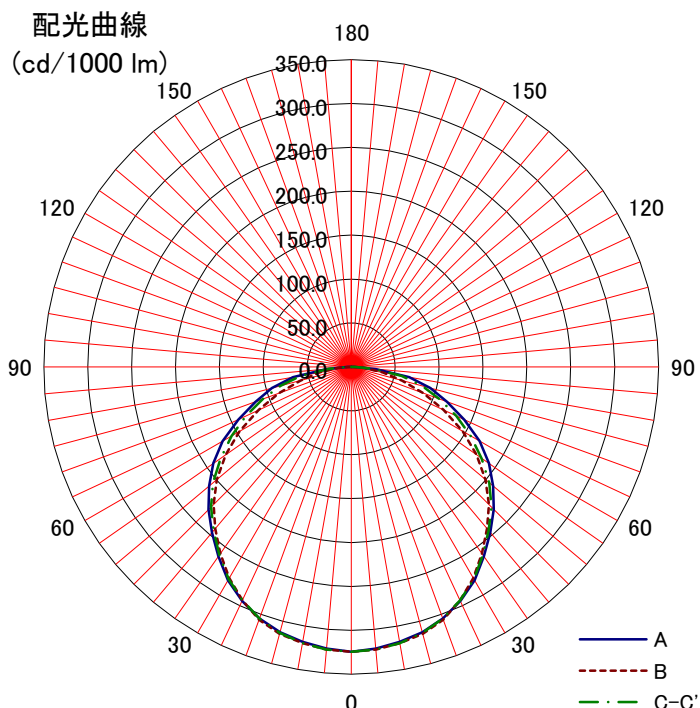

A
B
C-C'