


日立照明器具 照明特性


名称: 交換形LED下面開放	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NC4C	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.57	0.45	0.38	0.56	0.45	0.37	0.32	0.44	0.37	0.32	0.43	0.36	0.32	0.30	
	0.8	0.67	0.55	0.47	0.65	0.55	0.47	0.42	0.53	0.46	0.41	0.52	0.46	0.41	0.39	
姿図 	1	0.73	0.62	0.55	0.72	0.61	0.54	0.49	0.60	0.53	0.48	0.58	0.52	0.48	0.46	
	1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52	
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58	
	2	0.89	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66	
	2.5	0.92	0.86	0.80	0.91	0.85	0.80	0.75	0.82	0.78	0.74	0.80	0.77	0.73	0.71	
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.82	0.78	0.83	0.80	0.77	0.74	
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.83	0.87	0.85	0.82	0.79	
光源形式 CE405NB-J14	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
器具光束 5,360 lm	7	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.90	0.88	
	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.97	0.95	0.94	0.91	

器具効率 Ft= 100%
 上方光束 Fu= 0%
 下方光束 Fd= 100%

最大取付間隔		
A-A	1.26	H
B-B	1.24	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	339	339	339		
10	331	333	332		
20	315	312	314		
30	286	279	283		
40	253	238	245		
50	213	186	197		
60	171	134	153		
70	118	78	105		
80	77	29	57		
90	5	1	6		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

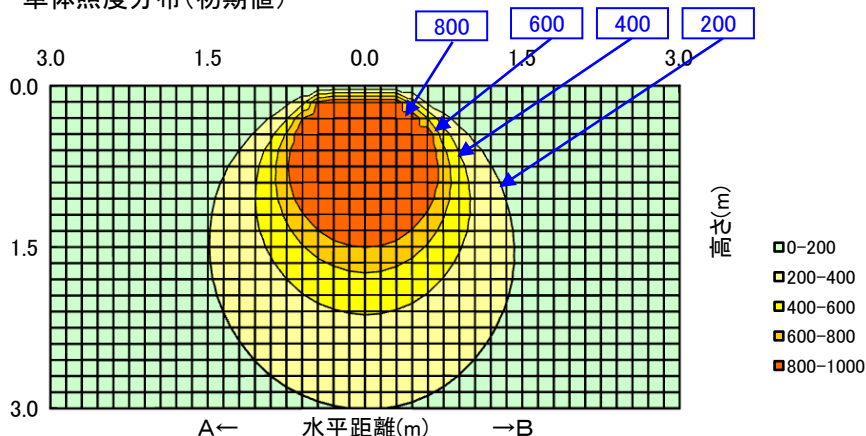

配光曲線
(cd/1000 lm)

