



日立照明器具 照明特性

名称: 交換形LED下面開放	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NC4C	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.31	0.43	0.36	0.31	0.42	0.36	0.31	0.29	
	0.8	0.66	0.55	0.47	0.65	0.54	0.46	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38	
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45	
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52	
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58	
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.65	
	2.5	0.92	0.86	0.80	0.91	0.85	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.73	0.71	
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74	
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.83	0.87	0.85	0.82	0.79	
光源形式 CE407NA-JX14	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.87	0.90	0.88	0.86	0.83	
器具光束 7,010 lm	7	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
	10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.97	0.96	0.97	0.96	0.94	0.91	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.28 H			
B-B		1.28 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	324	324	324		
10	318	319	318		
20	305	304	305		
30	280	277	278		
40	245	241	244		
50	211	196	205		
60	169	146	157		
70	115	88	111		
80	64	37	56		
90	5	1	4		
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

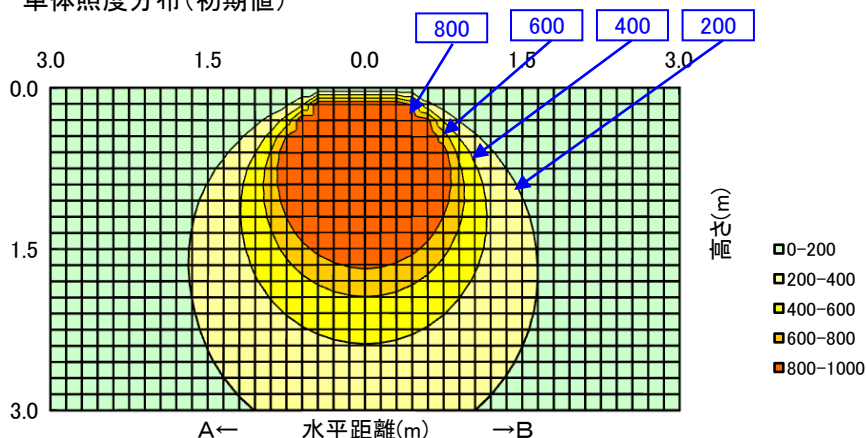

単位: 照度 (lx)

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

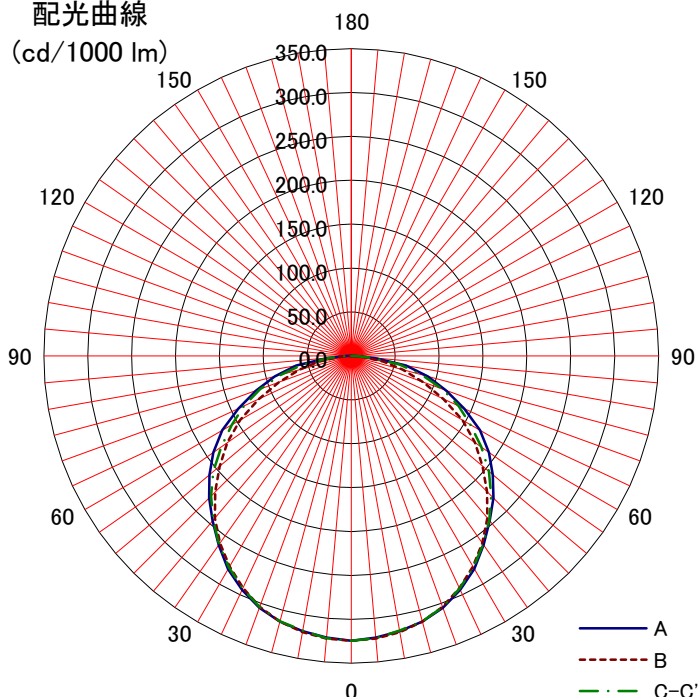

単位: 配光 (cd/1000 lm)

A
B
C-C'