


日立照明器具 照明特性

名称: 一体形LEDへース (ストレートタイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NE112AN-JZU24A	室指数	固有照明率 S/H=1.0														
<備考> 高出力タイプ 昼白色相当	0.6	0.56	0.44	0.36	0.54	0.43	0.36	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27	
	0.8	0.65	0.54	0.46	0.63	0.53	0.45	0.40	0.50	0.44	0.39	0.49	0.43	0.38	0.35	
姿図 	1	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.41	
	1.25	0.77	0.67	0.60	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48	
	1.5	0.82	0.73	0.66	0.79	0.71	0.64	0.59	0.68	0.62	0.58	0.65	0.61	0.56	0.53	
	2	0.87	0.80	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.66	0.72	0.68	0.64	0.60	
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.73	0.79	0.75	0.71	0.76	0.72	0.69	0.65	
	3	0.93	0.87	0.82	0.91	0.85	0.81	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.68	
	4	0.96	0.91	0.87	0.94	0.90	0.86	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.73	
光源形式 	5	0.98	0.94	0.91	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.85	0.83	0.81	0.76	
器具光束 14,400 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.92	0.90	0.88	0.89	0.87	0.85	0.81	
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.95	0.94	0.92	0.92	0.90	0.89	0.85	

器具効率 Ft= 100%		
上方光束 Fu= 6%		
下方光束 Fd= 94%		
最大取付間隔		
A-A		1.30 H
B-B		1.28 H
保守率	良	0.88
	中	0.86
	否	0.81


光度 (cd/1000 lm)				
	A-0	B-B	C-0	
0	298	298	298	
10	295	294	295	
20	281	280	281	
30	258	256	258	
40	227	225	227	
50	189	184	187	
60	149	137	142	
70	109	84	98	
80	64	32	54	
90	42	2	28	
100	26	3	15	
110	16	4	9	
120	12	5	9	
130	11	7	9	
140	11	7	9	
150	10	8	8	
160	10	9	8	
170	8	9	8	
180				

単体照度分布 (初期値)

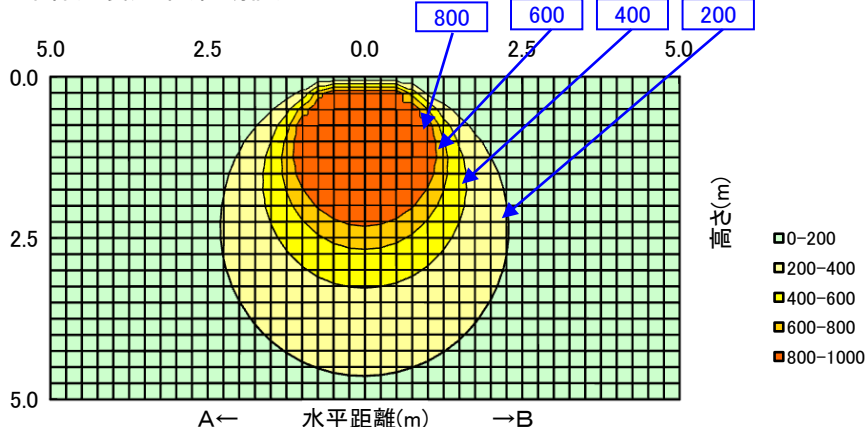

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

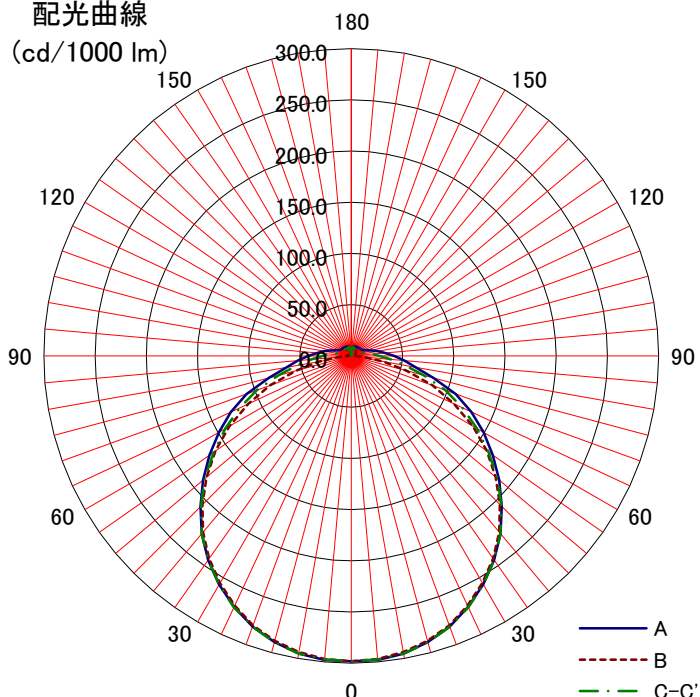

A
B
C-C'