
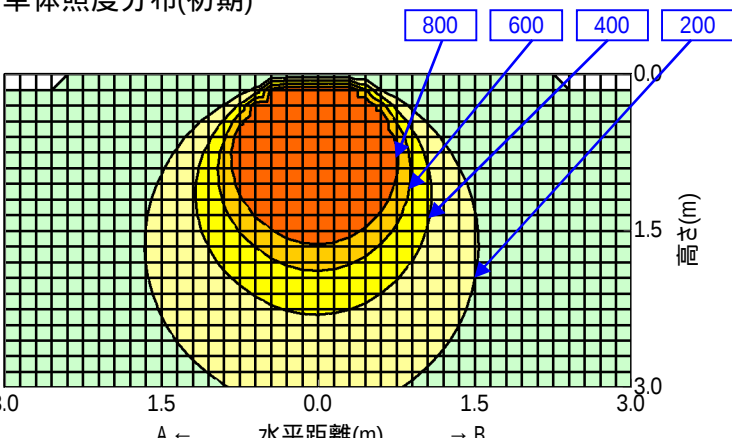

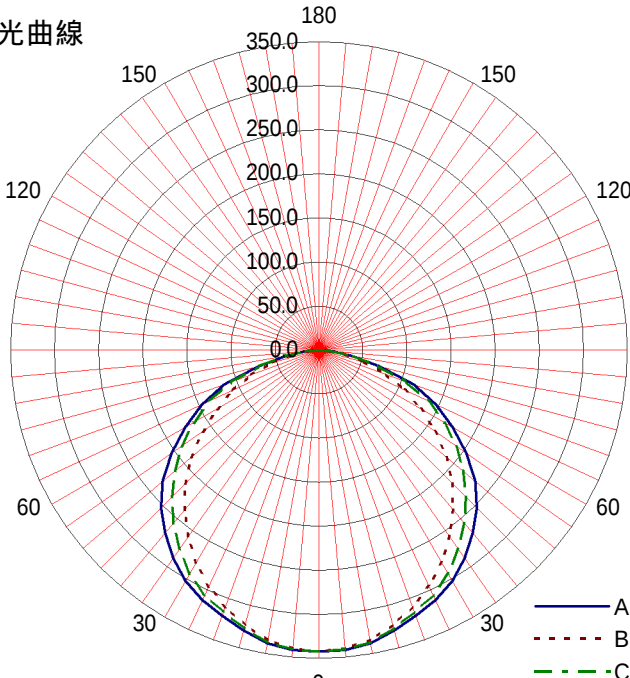


日立照明器具 照明特性

形式: NE32401D-JZ14		天井 壁 床 室指数	80%			70%				50%			30%			0%	
<定格出力タイプ> <昼光色相当> <照度補正、連続調光共用形>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31	
		0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.49	0.59	0.54	0.49	0.47	
		1.25	0.80	0.70	0.63	0.79	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
		1.5	0.85	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
		2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
		2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
		3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	6,180 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			単体照度分布(初期) 							
上方光束 Fu= 0.0%										
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔										
A-A 1.32 H										
B-B 1.22 H										
保守率	良	0.81								
	中	0.77								
	否	0.68								
光度 (cd/1000 lm)										
	A-0	B-B	C-0	A'-0	C'-0					
0	342	342	342							
10	338	333	337							
20	321	310	316							
30	302	279	293							
40	271	237	257							
50	231	189	214							
60	175	133	165							
70	114	82	106							
80	38	30	40							
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										

配光曲線		
		
A B C-C'		

配光曲線

