


日立照明器具 照明特性

形式: NE32401L-JZU14		天井	80%			70%				50%			30%			0%	
<高出力タイプ> <電球色相当> <照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
		室指数	照明率 S/H=1.0														
		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31	
		0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.49	0.59	0.54	0.49	0.47	
		1.25	0.80	0.70	0.63	0.79	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
		1.5	0.85	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
		2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
		2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
		3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	7,350 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 1.32 H

B-B 1.22 H

保守率

良 0.81


中 0.77

否 0.68

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	342	342	342		
10	338	333	337		
20	321	310	316		
30	302	279	293		
40	271	237	257		
50	231	189	214		
60	175	133	165		
70	114	82	106		
80	38	30	40		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

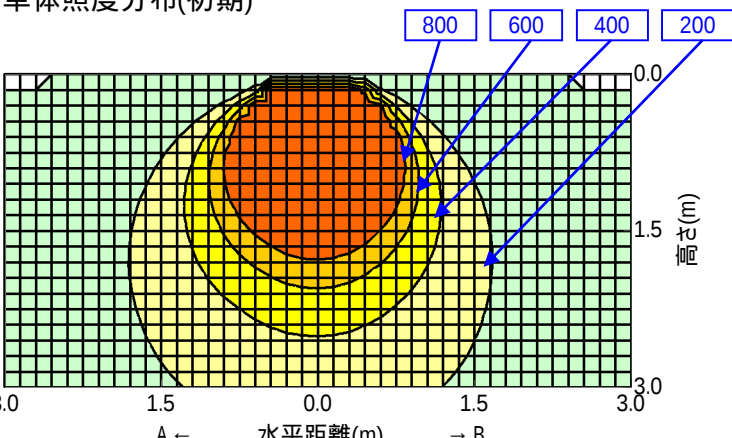


800 600 400 200

0.0 1.5 3.0 (m) 高さ

3.0 1.5 0.0 1.5 3.0 水平距離(m) A ← → B

0-200 200-400 400-600 600-800 800-1000

配光曲線

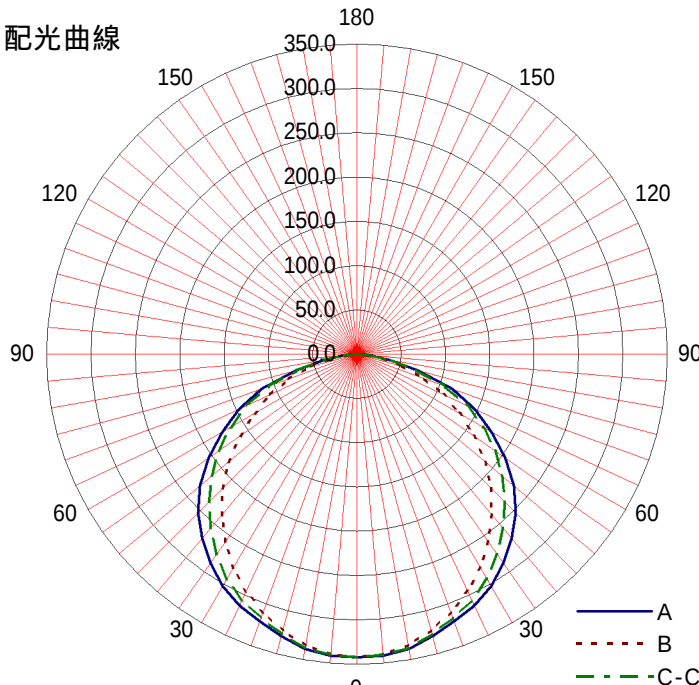

180 150 120 90 60 30 0

350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A B C-C'