
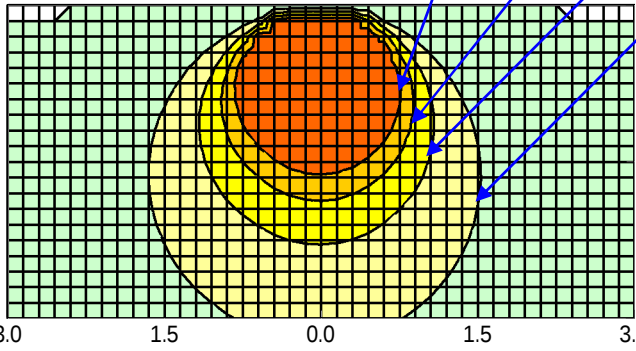
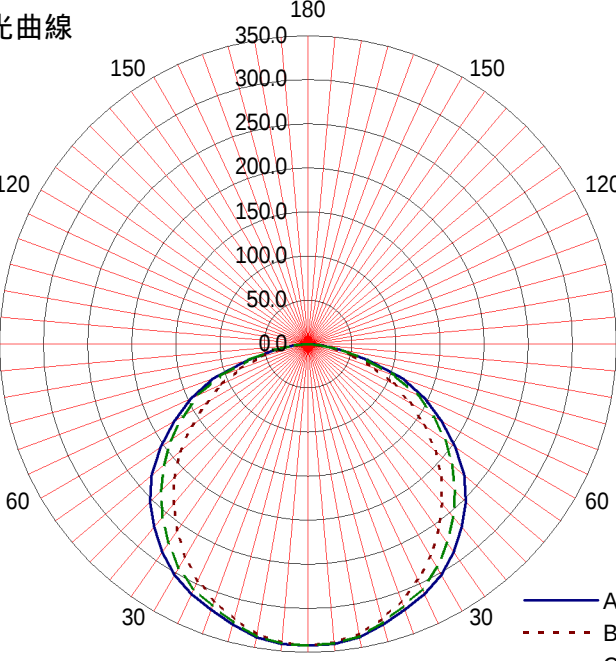


日立照明器具 照明特性

形式: NE32401W-JZ14		天井	80%			70%				50%			30%			0%	
<定格出力タイプ> <白色相当> <照度補正、連続調光共用形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31	
		0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
		1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.49	0.59	0.54	0.49	0.47	
		1.25	0.80	0.70	0.63	0.79	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
		1.5	0.85	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
		2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
		2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
		3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	6,120 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			単体照度分布(初期)  800600400200 0.01.53.0 3.01.50.0 A ← 水平距離(m) → B 0-200 200-400 400-600 600-800 800-1000													
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
配光分類																
BZ-																
最大取付間隔																
A-A 1.32 H																
B-B 1.22 H																
保守率	良	0.81														
	中	0.77														
	否	0.68														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	342	342	342													
10	338	333	337													
20	321	310	316													
30	302	279	293													
40	271	237	257													
50	231	189	214													
60	175	133	165													
70	114	82	106													
80	38	30	40													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線		
 1801501209060300 350.0300.0250.0200.0150.0100.050.00.0 01801501209060300 A B C-C'		