
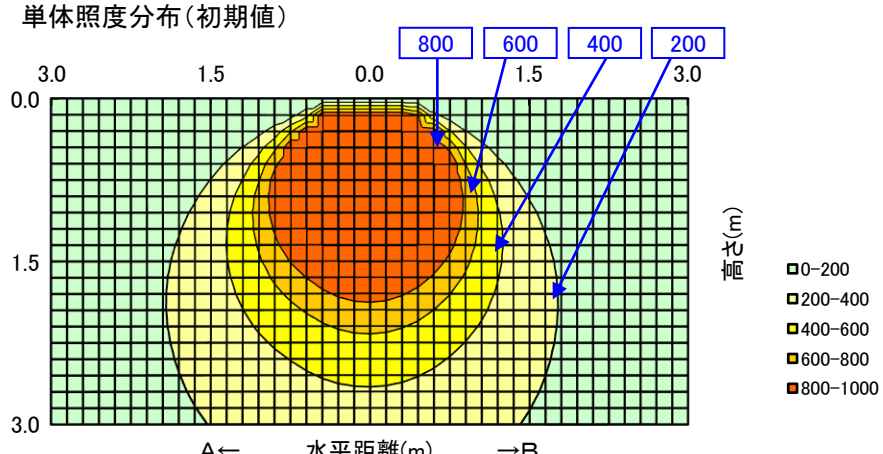
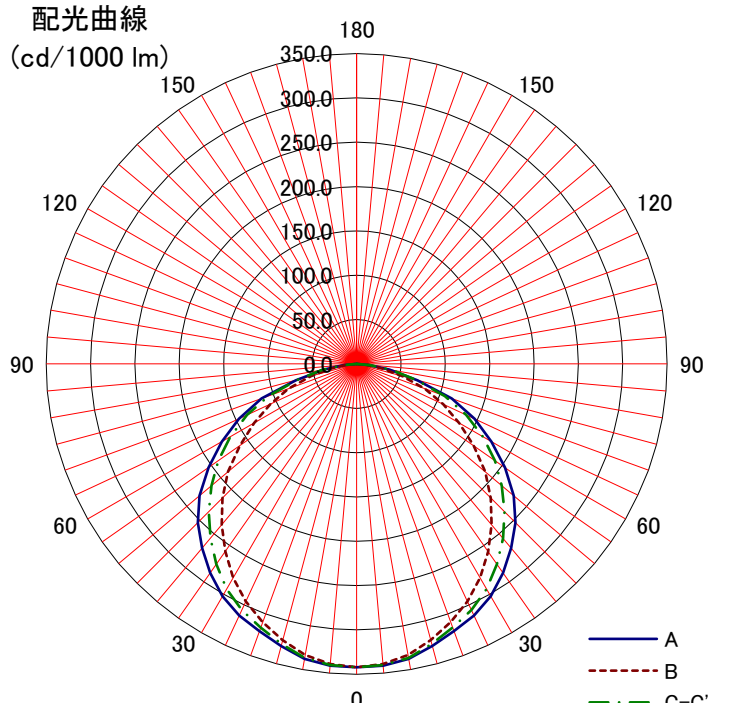


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NE324AD-JZU14A	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31		
	0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.49	0.59	0.54	0.49	0.47		
	1.25	0.80	0.70	0.63	0.79	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54		
	1.5	0.85	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60		
	2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68		
	2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73		
	3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76		
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.82		
光源形式 -	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85		
器具光束 8,240 lm	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90		
	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		(E) 7m															
A-A 1.32 H																	
B-B 1.22 H																	
保守率	良	0.86	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	342	342	342														
10	338	333	337														
20	321	310	316														
30	302	279	293														
40	271	237	257														
50	231	189	214														
60	175	133	165														
70	114	82	106														
80	38	30	40														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	