
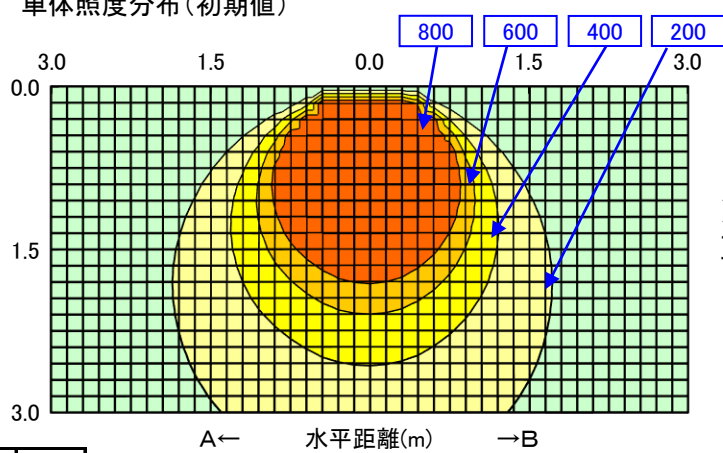
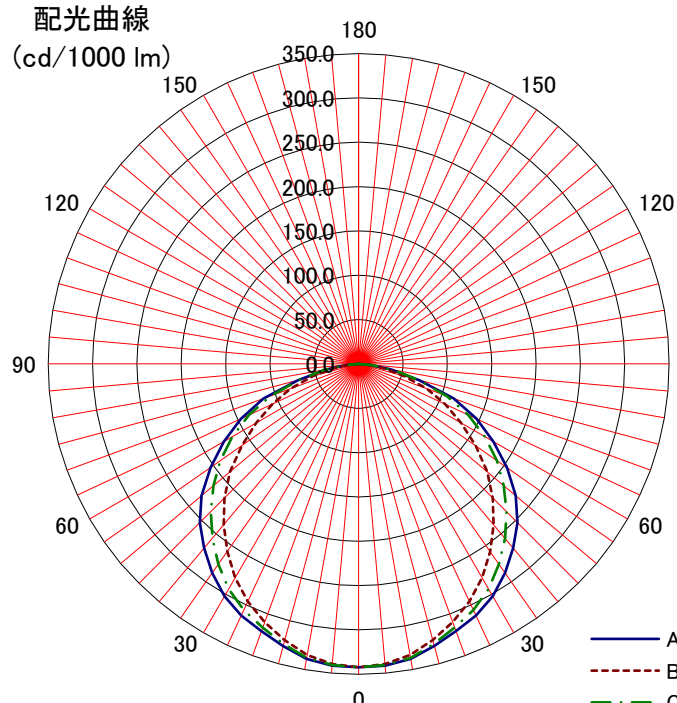


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NE324AWW-JZU14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.33	0.43	0.37	0.32	0.31	
	0.8	0.68	0.56	0.48	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.49	0.59	0.54	0.49	0.47	
	1.25	0.80	0.70	0.63	0.79	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54	
	1.5	0.85	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60	
	2	0.90	0.83	0.77	0.89	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68	
	2.5	0.94	0.88	0.82	0.92	0.86	0.82	0.77	0.84	0.80	0.76	0.82	0.79	0.75	0.73	
	3	0.96	0.91	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
-	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
7,730 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.32 H																
B-B 1.22 H																
保守率	良 0.86															
保守率	中 0.81															
	否 0.72															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	342	342	342													
10	338	333	337													
20	321	310	316													
30	302	279	293													
40	271	237	257													
50	231	189	214													
60	175	133	165													
70	114	82	106													
80	38	30	40													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																