
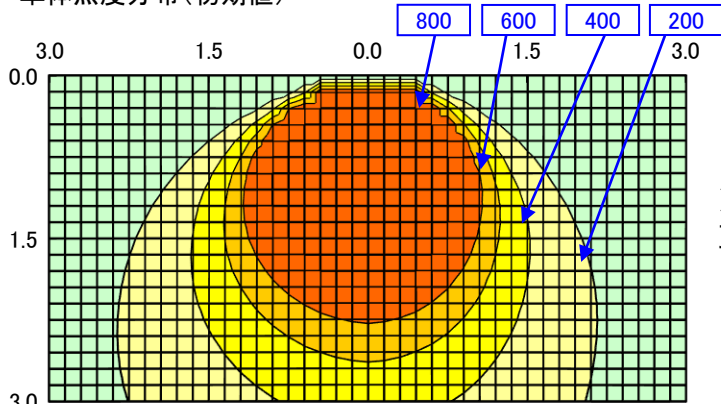
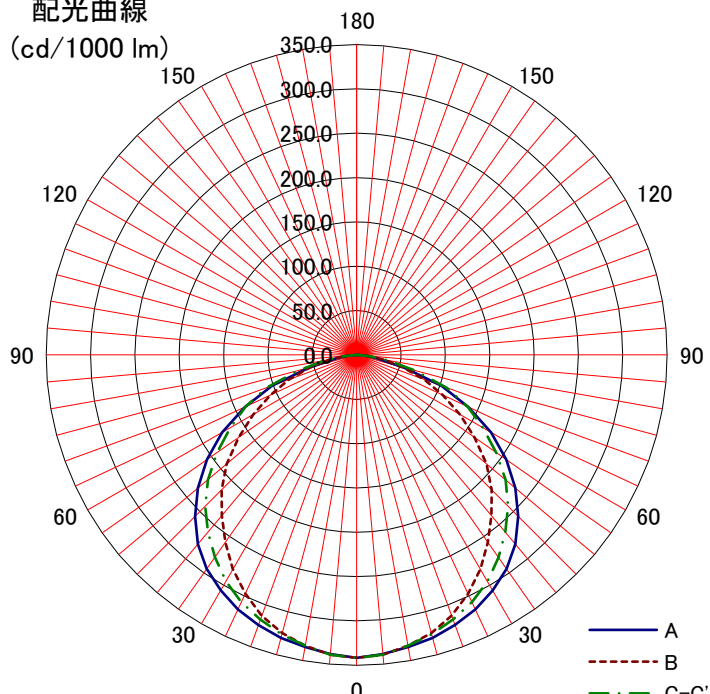


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: NE454AD-JZU14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31	
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.48	0.43	0.53	0.47	0.42	0.40	
姿図 	1	0.74	0.64	0.56	0.73	0.63	0.56	0.50	0.61	0.55	0.50	0.60	0.54	0.49	0.47	
	1.25	0.80	0.71	0.63	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.54	
	1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.60	
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.88	0.84	0.81	0.85	0.82	0.79	0.77	
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
光源形式 -	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束 12,230 lm	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90	
	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.34 H																
B-B 1.22 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'														
	A-0	B-B	C-0	A'-0	C'-0											
0	342	342	342													
10	335	333	333													
20	324	313	318													
30	307	279	295													
40	278	236	261													
50	233	191	219													
60	175	135	165													
70	102	81	108													
80	23	32	36													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																