

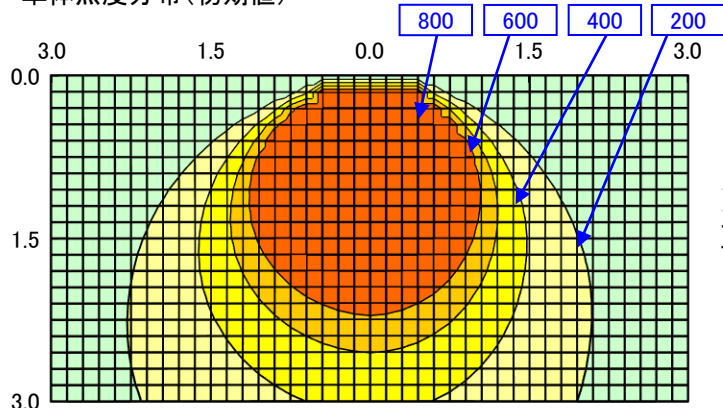


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: NE454AWW-JZU14A	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31				
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.48	0.43	0.53	0.47	0.42	0.40				
姿図 	1	0.74	0.64	0.56	0.73	0.63	0.56	0.50	0.61	0.55	0.50	0.60	0.54	0.49	0.47				
	1.25	0.80	0.71	0.63	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.54				
	1.5	0.85	0.76	0.69	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.60				
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68				
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73				
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.88	0.84	0.81	0.85	0.82	0.79	0.77				
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82				
-	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85				
器具光束	7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90				
11,470 lm	10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.34 H																			
B-B 1.22 H																			
保守率	良															0.86			
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	342															342	342		
10	335															333	333		
20	324															313	318		
30	307															279	295		
40	278															236	261		
50	233															191	219		
60	175															135	165		
70	102															81	108		
80	23															32	36		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			

配光曲線
(cd/1000 lm)

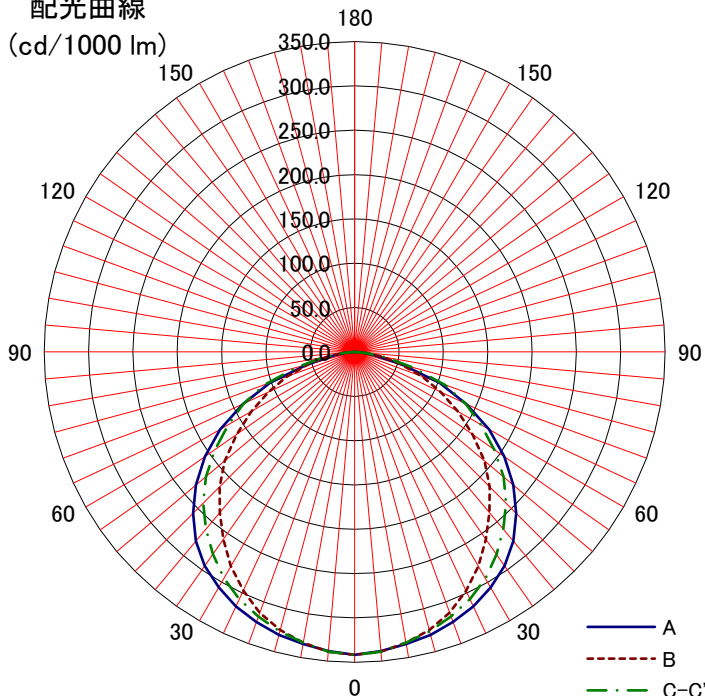