


日立照明器具 照明特性

形式: NK4220-MEN14		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.43	0.33	0.26	0.42	0.32	0.26	0.22	0.31	0.26	0.22	0.30	0.25	0.21	0.19
		0.8	0.50	0.40	0.34	0.49	0.40	0.33	0.29	0.38	0.33	0.28	0.37	0.32	0.28	0.26
		1	0.55	0.46	0.39	0.54	0.45	0.39	0.34	0.43	0.38	0.33	0.42	0.37	0.33	0.31
		1.25	0.60	0.51	0.45	0.58	0.50	0.44	0.40	0.48	0.43	0.39	0.46	0.42	0.38	0.36
		1.5	0.63	0.55	0.49	0.62	0.54	0.49	0.44	0.52	0.47	0.43	0.50	0.46	0.43	0.40
		2	0.68	0.61	0.56	0.66	0.60	0.55	0.51	0.58	0.54	0.50	0.56	0.52	0.49	0.46
		2.5	0.71	0.65	0.60	0.69	0.64	0.59	0.55	0.61	0.57	0.54	0.59	0.56	0.53	0.50
		3	0.73	0.68	0.63	0.71	0.66	0.62	0.59	0.64	0.60	0.57	0.62	0.59	0.56	0.53
		4	0.75	0.71	0.67	0.74	0.70	0.66	0.63	0.67	0.65	0.62	0.65	0.63	0.60	0.57
品名	Hf蛍光ランプ	5	0.77	0.74	0.70	0.76	0.72	0.69	0.67	0.70	0.67	0.65	0.68	0.65	0.63	0.60
形式	FHF32EX-N-H	7	0.79	0.77	0.74	0.78	0.75	0.73	0.71	0.73	0.71	0.69	0.71	0.69	0.67	0.64
光束	7,040 lm	10	0.81	0.79	0.77	0.80	0.78	0.76	0.75	0.75	0.74	0.73	0.73	0.72	0.71	0.68

器具効率 Ft= 78.9%
 上方光束 Fu= 3.3%
 下方光束 Fd= 75.6%

配光分類

BZ-

最大取付間隔

A-A 1.42 H


B-B 1.28 H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	210	210	210
10	209	206	207
20	203	194	199
30	198	179	186
40	186	156	171
50	169	125	150
60	150	92	125
70	120	58	99
80	81	26	61
90	45	1	29
100	27		14
110	10	1	1
120	1	1	1
130	1	1	1
140			
150			
160			
170			
180			

単体照度分布(初期)

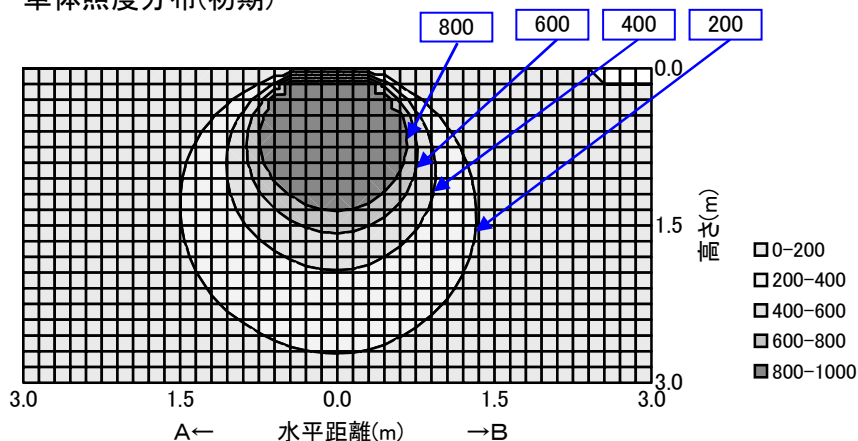

配光曲線

