



日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NKE2105-J14A	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.26	0.37	0.30	0.25	0.35	0.29	0.25	0.23	
	0.8	0.59	0.47	0.40	0.57	0.47	0.39	0.34	0.45	0.38	0.33	0.43	0.37	0.33	0.30	
姿図 	1	0.65	0.54	0.46	0.63	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.38	0.35	
	1.25	0.70	0.60	0.52	0.68	0.59	0.51	0.46	0.56	0.50	0.45	0.54	0.49	0.44	0.41	
	1.5	0.74	0.65	0.57	0.72	0.63	0.57	0.51	0.61	0.55	0.50	0.59	0.53	0.49	0.46	
	2	0.80	0.71	0.65	0.77	0.70	0.64	0.59	0.67	0.62	0.57	0.65	0.60	0.56	0.53	
	2.5	0.83	0.76	0.70	0.81	0.74	0.69	0.64	0.71	0.66	0.62	0.69	0.64	0.61	0.57	
	3	0.85	0.79	0.73	0.83	0.77	0.72	0.67	0.74	0.70	0.66	0.71	0.68	0.64	0.61	
光源	4	0.88	0.83	0.78	0.86	0.81	0.77	0.73	0.78	0.75	0.71	0.75	0.72	0.69	0.66	
品名直管形LEDランプ	5	0.90	0.86	0.82	0.88	0.84	0.80	0.77	0.81	0.78	0.75	0.78	0.76	0.73	0.69	
形式LDK20SS-D/10/12NA	7	0.93	0.90	0.86	0.91	0.88	0.85	0.82	0.85	0.82	0.80	0.82	0.80	0.78	0.74	
光束1,260 lm	10	0.95	0.93	0.90	0.93	0.91	0.89	0.87	0.88	0.86	0.84	0.85	0.83	0.82	0.78	

器具効率 Ft= 93.3%					
上方光束 Fu= 4.5%					
下方光束 Fd= 88.8%					
最大取付間隔					
A-A		1.36	H		
B-B		1.26	H		
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	247	247	247		
10	247	245	246		
20	242	230	239		
30	225	210	220		
40	207	177	193		
50	184	141	168		
60	164	103	139		
70	141	61	107		
80	119	20	83		
90	96		64		
100	45		11		
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布(初期値)

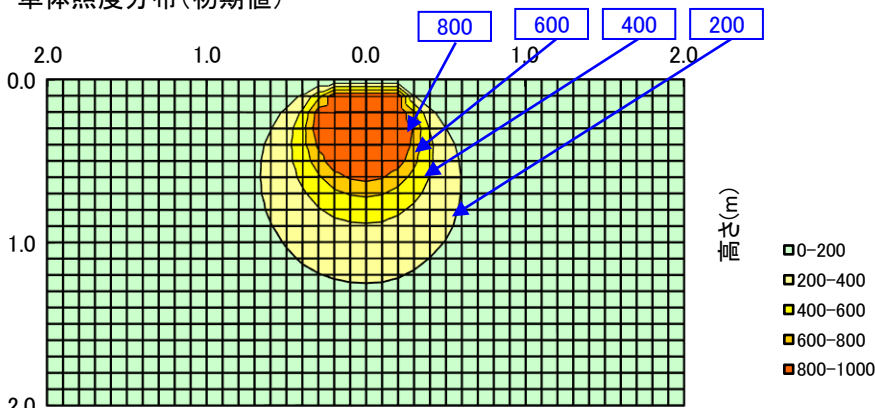

0-200
200-400
400-600
600-800
800-1000

水平距離(m)

配光曲線
(cd/1000 lm)

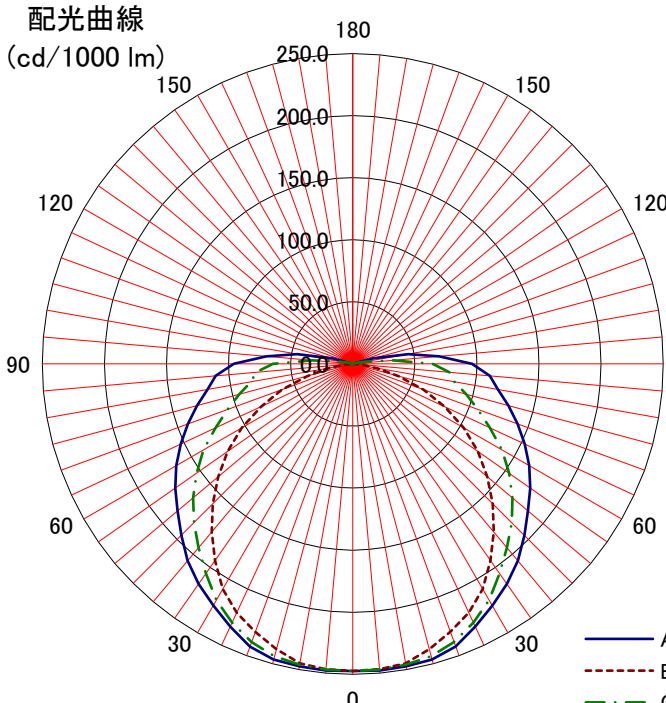

A
B
C-C'