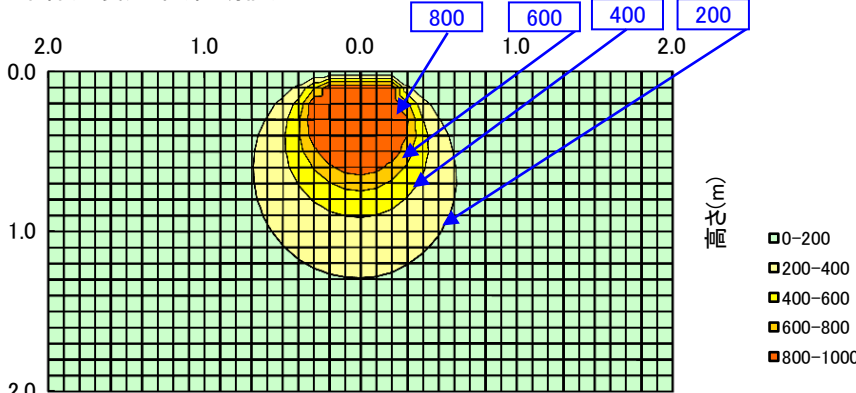
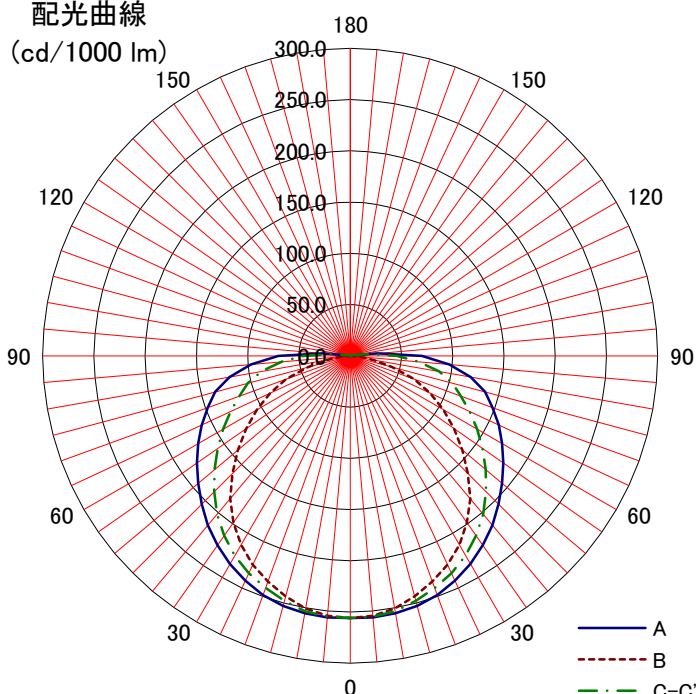


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
			床	10%														0%																																																																																																																					
形式: NKE2190-J14AA	室指数	照明率 S/H=1.0																																																																																																																																					
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.25	0.23																																																																																																																								
	0.8	0.59	0.48	0.40	0.58	0.47	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.33	0.31																																																																																																																								
姿図 	1	0.65	0.54	0.46	0.63	0.53	0.46	0.40	0.51	0.45	0.39	0.49	0.44	0.39	0.37																																																																																																																								
	1.25	0.70	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.51	0.46	0.55	0.50	0.45	0.42																																																																																																																								
	1.5	0.74	0.65	0.58	0.73	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.54	0.50	0.47																																																																																																																								
	2	0.80	0.72	0.65	0.78	0.71	0.64	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.55																																																																																																																								
	2.5	0.83	0.76	0.70	0.81	0.75	0.69	0.64	0.72	0.68	0.63	0.70	0.66	0.62	0.59																																																																																																																								
	3	0.86	0.79	0.74	0.84	0.78	0.73	0.68	0.75	0.71	0.67	0.73	0.69	0.66	0.63																																																																																																																								
	4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.68																																																																																																																								
光源	4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.68																																																																																																																								
品名 直管形LEDランプ	5	0.91	0.86	0.82	0.89	0.85	0.81	0.78	0.82	0.79	0.76	0.80	0.77	0.75	0.72																																																																																																																								
形式 LDK20SS-N/10/13NA	7	0.94	0.90	0.87	0.92	0.89	0.86	0.83	0.86	0.84	0.81	0.84	0.82	0.80	0.76																																																																																																																								
光束 1,300 lm	10	0.96	0.93	0.91	0.94	0.92	0.90	0.88	0.89	0.88	0.86	0.87	0.85	0.84	0.81																																																																																																																								
器具効率 Ft= 93.1%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 2.0%																																																																																																																																							
下方光束 Fd= 91.1%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 1.38 H																																																																																																																																							
B-B 1.24 H																																																																																																																																							
保守率																																																																																																																																							
良	0.86																																																																																																																																						
中	0.81																																																																																																																																						
否	0.72																																																																																																																																						
光度 (cd/1000 lm)		<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>256</td><td>256</td><td>256</td><td></td><td></td></tr><tr><td>10</td><td>255</td><td>251</td><td>253</td><td></td><td></td></tr><tr><td>20</td><td>249</td><td>235</td><td>241</td><td></td><td></td></tr><tr><td>30</td><td>235</td><td>213</td><td>225</td><td></td><td></td></tr><tr><td>40</td><td>216</td><td>182</td><td>202</td><td></td><td></td></tr><tr><td>50</td><td>194</td><td>143</td><td>173</td><td></td><td></td></tr><tr><td>60</td><td>171</td><td>105</td><td>143</td><td></td><td></td></tr><tr><td>70</td><td>148</td><td>66</td><td>115</td><td></td><td></td></tr><tr><td>80</td><td>120</td><td>23</td><td>88</td><td></td><td></td></tr><tr><td>90</td><td>70</td><td></td><td>46</td><td></td><td></td></tr><tr><td>100</td><td>1</td><td></td><td>2</td><td></td><td></td></tr><tr><td>110</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	256	256	256			10	255	251	253			20	249	235	241			30	235	213	225			40	216	182	202			50	194	143	173			60	171	105	143			70	148	66	115			80	120	23	88			90	70		46			100	1		2			110	1		1			120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	256															256	256																																																																																																																						
10	255															251	253																																																																																																																						
20	249															235	241																																																																																																																						
30	235															213	225																																																																																																																						
40	216															182	202																																																																																																																						
50	194															143	173																																																																																																																						
60	171															105	143																																																																																																																						
70	148															66	115																																																																																																																						
80	120															23	88																																																																																																																						
90	70																46																																																																																																																						
100	1																2																																																																																																																						
110	1																1																																																																																																																						
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							