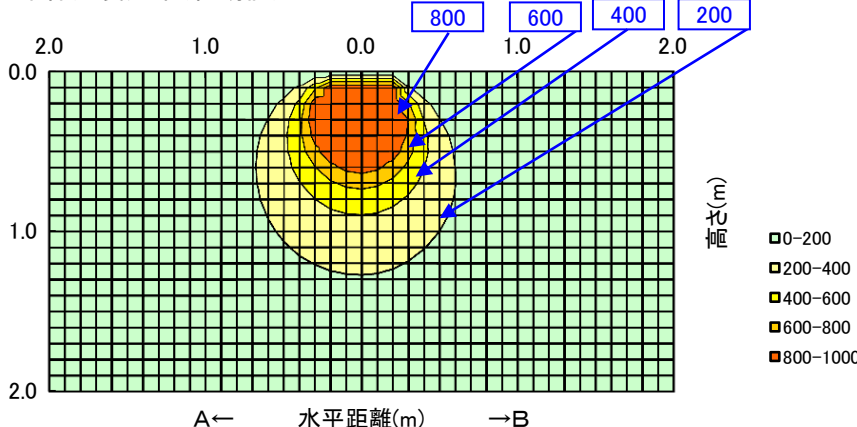
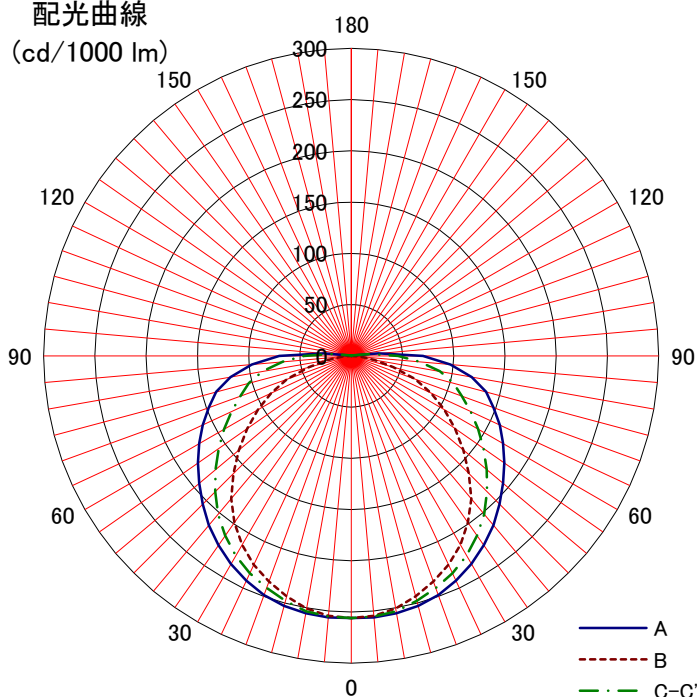


日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NKE2190-J14AA1	室指数	照明率 S/H=1.0														
<備考> 姿図 	0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.25	0.23	
	0.8	0.59	0.48	0.40	0.58	0.47	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.33	0.31	
	1	0.65	0.54	0.46	0.63	0.53	0.46	0.40	0.51	0.45	0.39	0.49	0.44	0.39	0.37	
	1.25	0.70	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.5	0.74	0.65	0.58	0.73	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.54	0.50	0.47	
	2	0.80	0.72	0.65	0.78	0.71	0.64	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.55	
	2.5	0.83	0.76	0.70	0.81	0.75	0.69	0.64	0.72	0.68	0.63	0.70	0.66	0.62	0.59	
	3	0.86	0.79	0.74	0.84	0.78	0.73	0.68	0.75	0.71	0.67	0.73	0.69	0.66	0.63	
光源	4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.68	
品名 直管形LEDランプ	5	0.91	0.86	0.82	0.89	0.85	0.81	0.78	0.82	0.79	0.76	0.80	0.77	0.75	0.72	
形式 LDK20SS-D/10/12NA	7	0.94	0.90	0.87	0.92	0.89	0.86	0.83	0.86	0.84	0.81	0.84	0.82	0.80	0.76	
光束 1,260 lm	10	0.96	0.93	0.91	0.94	0.92	0.90	0.88	0.89	0.88	0.86	0.87	0.85	0.84	0.81	
器具効率 Ft= 93.1%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 2.0%																
下方光束 Fd= 91.1%																
最大取付間隔																
A-A 1.38 H																
B-B 1.24 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'														
	A-0	B-B	C-0	A'-0	C'-0											
0	256	256	256													
10	255	251	253													
20	249	235	241													
30	235	213	225													
40	216	182	202													
50	194	143	173													
60	171	105	143													
70	148	66	115													
80	120	23	88													
90	70		46													
100	1		2													
110	1		1													
120																
130																
140																
150																
160																
170																
180																