

日立照明器具 照明特性


名称:直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NKE2190-J14AA1	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.26	0.37	0.30	0.26	0.36	0.30	0.25	0.23	
	0.8	0.59	0.48	0.40	0.58	0.47	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.33	0.31	
姿図 	1	0.65	0.54	0.46	0.63	0.53	0.46	0.40	0.51	0.45	0.39	0.49	0.44	0.39	0.37	
	1.25	0.70	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.5	0.74	0.65	0.58	0.73	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.54	0.50	0.47	
	2	0.80	0.72	0.65	0.78	0.71	0.64	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.55	
	2.5	0.83	0.76	0.70	0.81	0.75	0.69	0.64	0.72	0.68	0.63	0.70	0.66	0.62	0.59	
	3	0.86	0.79	0.74	0.84	0.78	0.73	0.68	0.75	0.71	0.67	0.73	0.69	0.66	0.63	
	4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.68	
	5	0.91	0.86	0.82	0.89	0.85	0.81	0.78	0.82	0.79	0.76	0.80	0.77	0.75	0.72	
品名:直管形LEDランプ [®]	7	0.94	0.90	0.87	0.92	0.89	0.86	0.83	0.86	0.84	0.81	0.84	0.82	0.80	0.76	
形式:LDK20SS-N/10/13NA	10	0.96	0.93	0.91	0.94	0.92	0.90	0.88	0.89	0.88	0.86	0.87	0.85	0.84	0.81	
光束:1,300 lm																

器具効率 Ft= 93.1%
 上方光束 Fu= 2.0%
 下方光束 Fd= 91.1%

最大取付間隔		
A-A	1.38	H
B-B	1.24	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	256	256	256		
10	255	251	253		
20	249	235	241		
30	235	213	225		
40	216	182	202		
50	194	143	173		
60	171	105	143		
70	148	66	115		
80	120	23	88		
90	70		46		
100	1		2		
110	1		1		
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

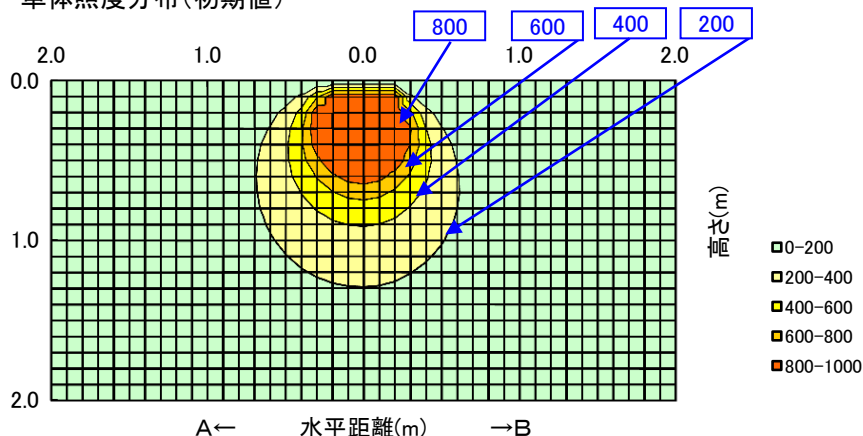

配光曲線

