



日立照明器具 照明特性

名称: 直管形LED搭載器具		反射壁	80%			70%			50%			30%			0%			
		床	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%			
形式: NKE2205-J14A			室指数 照明率 S/H=1.0															
<備考>		0.6	0.49	0.38	0.30	0.48	0.37	0.30	0.25	0.36	0.29	0.25	0.35	0.29	0.25	0.23		
姿図		0.8	0.57	0.46	0.39	0.56	0.45	0.38	0.33	0.44	0.37	0.33	0.42	0.37	0.32	0.30		
		1	0.63	0.52	0.45	0.61	0.51	0.44	0.39	0.49	0.43	0.38	0.48	0.42	0.38	0.35		
		1.25	0.68	0.58	0.51	0.66	0.57	0.50	0.45	0.55	0.49	0.44	0.53	0.48	0.44	0.41		
		1.5	0.72	0.63	0.56	0.70	0.62	0.55	0.50	0.60	0.54	0.49	0.58	0.53	0.49	0.46		
		2	0.77	0.70	0.63	0.75	0.68	0.63	0.58	0.66	0.61	0.57	0.64	0.59	0.56	0.53		
		2.5	0.80	0.74	0.68	0.79	0.72	0.67	0.63	0.70	0.65	0.62	0.68	0.64	0.60	0.57		
		3	0.83	0.77	0.72	0.81	0.75	0.71	0.66	0.73	0.69	0.65	0.70	0.67	0.64	0.61		
光源		4	0.86	0.81	0.77	0.84	0.79	0.75	0.72	0.77	0.73	0.70	0.74	0.71	0.69	0.66		
品名	直管形LEDランプ	5	0.88	0.84	0.80	0.86	0.82	0.79	0.76	0.80	0.77	0.74	0.77	0.75	0.72	0.69		
形式	LDK20SS-N/10/13NA	7	0.90	0.87	0.84	0.89	0.86	0.83	0.81	0.83	0.81	0.79	0.81	0.79	0.77	0.74		
光束	2,600 lm	10	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.86	0.84	0.83	0.83	0.82	0.81	0.77		
器具効率 Ft=		89.5%																
上方光束 Fu=		2.8%																
下方光束 Fd=		86.7%																
最大取付間隔																		
A-A		1.36	H															
B-B		1.26	H															
保守率	良	0.86																
	中	0.81																
	否	0.72																
光度(cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	248	248	248															
10	245	245	244															
20	238	229	234															
30	224	207	218															
40	207	178	194															
50	187	142	165															
60	169	107	139															
70	142	69	112															
80	97	23	78															
90	48		34															
100	29		11															
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		

単体照度分布(初期値)

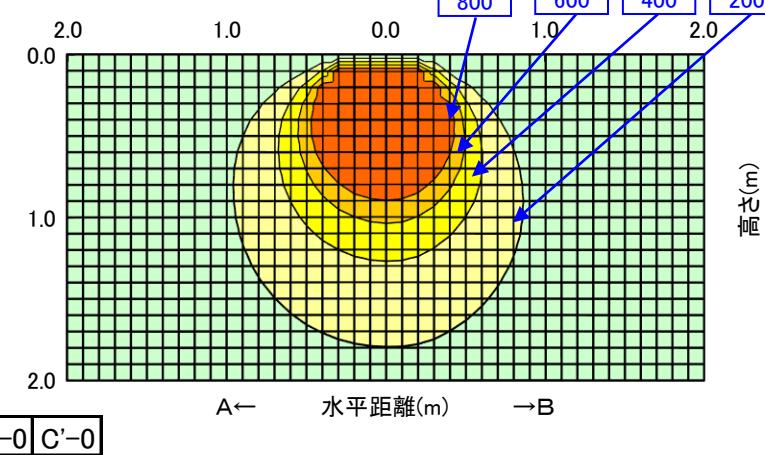

配光曲線(cd/1000 lm)

