

日立照明器具 照明特性


名称:直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NKE2290-J14AA1	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.49	0.38	0.31	0.48	0.37	0.30	0.25	0.36	0.30	0.25	0.35	0.29	0.25	0.23	
	0.8	0.57	0.46	0.39	0.56	0.46	0.39	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31	
姿図 	1	0.63	0.53	0.45	0.62	0.52	0.45	0.39	0.50	0.44	0.39	0.49	0.43	0.38	0.36	
	1.25	0.68	0.59	0.51	0.67	0.58	0.51	0.46	0.56	0.50	0.45	0.54	0.49	0.44	0.42	
	1.5	0.72	0.64	0.57	0.71	0.62	0.56	0.51	0.60	0.55	0.50	0.59	0.54	0.50	0.47	
	2	0.78	0.70	0.64	0.76	0.69	0.63	0.58	0.67	0.62	0.58	0.65	0.60	0.57	0.54	
	2.5	0.81	0.74	0.69	0.79	0.73	0.68	0.63	0.71	0.66	0.62	0.69	0.65	0.62	0.59	
	3	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.68	0.65	0.62	
	4	0.86	0.81	0.77	0.85	0.80	0.76	0.73	0.78	0.74	0.71	0.76	0.73	0.70	0.67	
	5	0.88	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.78	0.76	0.74	0.71	
品名:直管形LEDランプ [®]	7	0.91	0.88	0.85	0.89	0.87	0.84	0.82	0.84	0.82	0.80	0.82	0.80	0.78	0.75	
形式:LDK20SS-D/10/12NA	10	0.93	0.91	0.89	0.91	0.89	0.87	0.86	0.87	0.85	0.84	0.85	0.84	0.82	0.79	
光束:2,520 lm																

器具効率 Ft= 89.6%
 上方光束 Fu= 1.0%
 下方光束 Fd= 88.5%

最大取付間隔		
A-A	1.38	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	253	253	253		
10	251	250	250		
20	244	236	239		
30	234	212	225		
40	214	182	201		
50	191	144	171		
60	170	107	141		
70	147	65	118		
80	99	22	82		
90	26		29		
100	1		2		
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

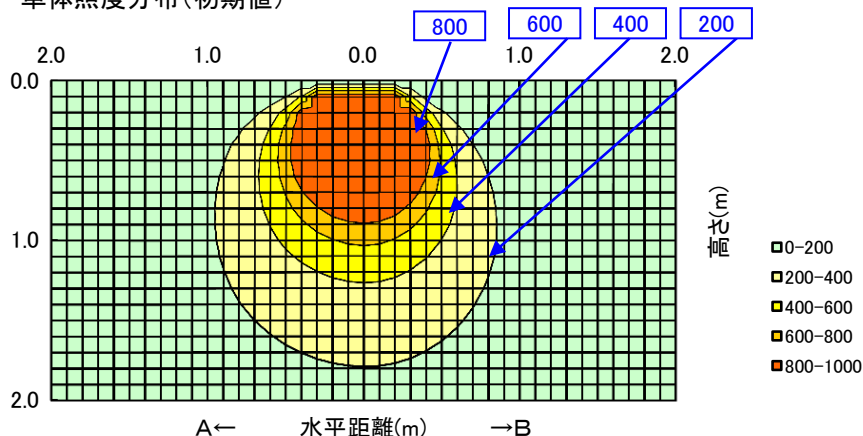

配光曲線
(cd/1000 lm)

