

日立照明器具 照明特性


形式: NKE4105-J14A		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.54	0.41	0.33	0.52	0.40	0.33	0.27	0.39	0.32	0.27	0.38	0.31	0.27	0.24		
		0.8	0.63	0.50	0.42	0.61	0.50	0.42	0.36	0.48	0.41	0.35	0.46	0.40	0.35	0.32		
		1	0.69	0.57	0.49	0.67	0.56	0.48	0.42	0.54	0.47	0.41	0.52	0.46	0.41	0.38		
		1.25	0.75	0.64	0.56	0.73	0.62	0.55	0.49	0.60	0.53	0.48	0.58	0.52	0.47	0.44		
		1.5	0.79	0.69	0.61	0.77	0.68	0.60	0.54	0.65	0.59	0.53	0.63	0.57	0.52	0.49		
		2	0.85	0.76	0.69	0.83	0.75	0.68	0.62	0.72	0.66	0.61	0.69	0.64	0.60	0.57		
		2.5	0.88	0.81	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.65	0.62		
		3	0.91	0.84	0.78	0.89	0.82	0.77	0.72	0.79	0.75	0.70	0.77	0.73	0.69	0.65		
光源		4	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.84	0.80	0.76	0.81	0.78	0.74	0.71		
品名	LED直管ランプ	5	0.96	0.92	0.87	0.94	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.75		
形式	LDK40SS-N/18/24A	7	0.99	0.96	0.92	0.97	0.94	0.91	0.88	0.91	0.88	0.86	0.88	0.86	0.84	0.80		
器具光束	2,240 lm	10	1.02	0.99	0.96	1.00	0.97	0.95	0.93	0.94	0.92	0.90	0.91	0.90	0.88	0.84		

器具効率 Ft= 100.0%
 上方光束 Fu= 3.9%
 下方光束 Fd= 96.1%

配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	266	266	266		
10	266	262	264		
20	254	250	254		
30	237	228	231		
40	217	196	206		
50	196	165	181		
60	172	123	149		
70	145	75	117		
80	124	30	90		
90	95		63		
100	23		6		
110	1		1		
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

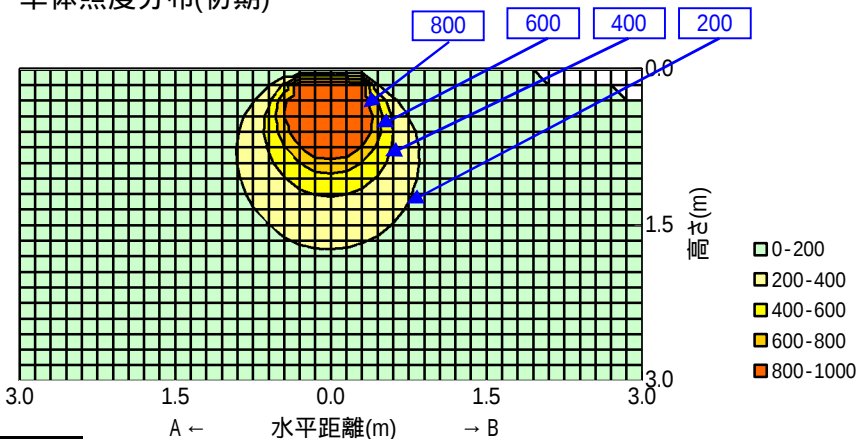

配光曲線

