


日立照明器具 照明特性


名称: 直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NKE4105-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.32	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.59	0.48	0.41	0.58	0.47	0.40	0.35	0.46	0.39	0.34	0.44	0.38	0.34	0.31	
姿図 	1	0.65	0.55	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.49	0.44	0.39	0.37	
	1.25	0.70	0.61	0.53	0.69	0.59	0.53	0.47	0.57	0.51	0.46	0.55	0.50	0.45	0.42	
	1.5	0.74	0.65	0.58	0.72	0.64	0.58	0.52	0.62	0.56	0.51	0.59	0.54	0.50	0.47	
	2	0.80	0.72	0.66	0.78	0.71	0.65	0.60	0.68	0.63	0.58	0.65	0.61	0.57	0.54	
	2.5	0.83	0.76	0.70	0.81	0.75	0.69	0.65	0.72	0.67	0.63	0.69	0.65	0.62	0.58	
	3	0.85	0.79	0.74	0.83	0.78	0.73	0.68	0.75	0.70	0.67	0.72	0.68	0.65	0.62	
	4	0.88	0.83	0.79	0.86	0.82	0.77	0.74	0.79	0.75	0.72	0.76	0.73	0.70	0.66	
光源	5	0.90	0.86	0.82	0.88	0.84	0.81	0.78	0.81	0.78	0.76	0.78	0.76	0.74	0.70	
品名 直管形LEDランプ	7	0.93	0.90	0.87	0.91	0.88	0.85	0.83	0.85	0.83	0.80	0.82	0.80	0.78	0.74	
形式 LDK40SS・D/22/34NE	10	0.95	0.93	0.90	0.93	0.91	0.89	0.87	0.88	0.86	0.85	0.85	0.83	0.82	0.78	
光束 3,490 lm																

器具効率 Ft= 92.6%
 上方光束 Fu= 4.6%
 下方光束 Fd= 88.0%

最大取付間隔			
A-A	1.32	H	
B-B	1.24	H	
保守率	良	0.86	
	中	0.81	
	否	0.72	

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	266	266	266		
10	264	262	263		
20	253	245	251		
30	232	221	226		
40	211	187	200		
50	184	147	166		
60	155	108	132		
70	128	65	101		
80	102	21	74		
90	80		54		
100	51		18		
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

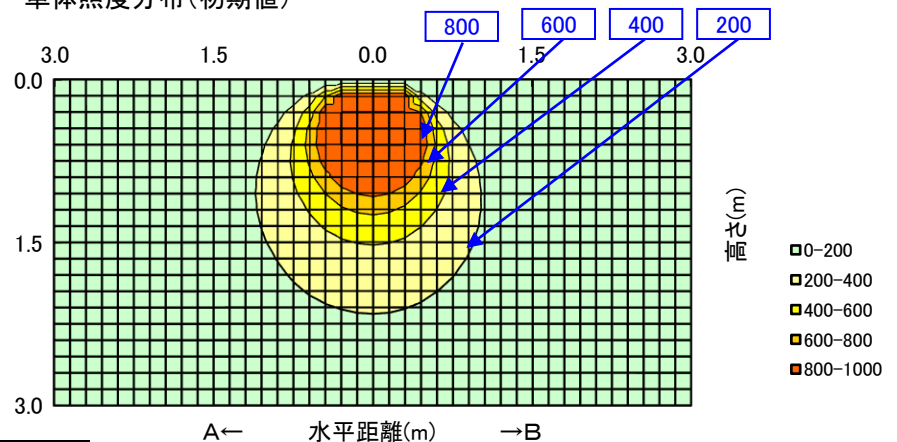

配光曲線
(cd/1000 lm)

