
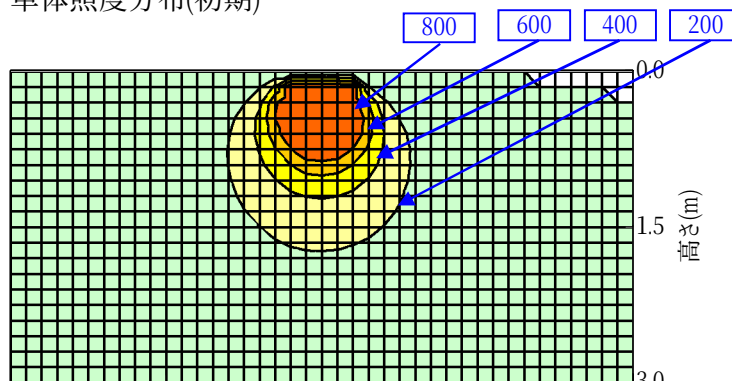
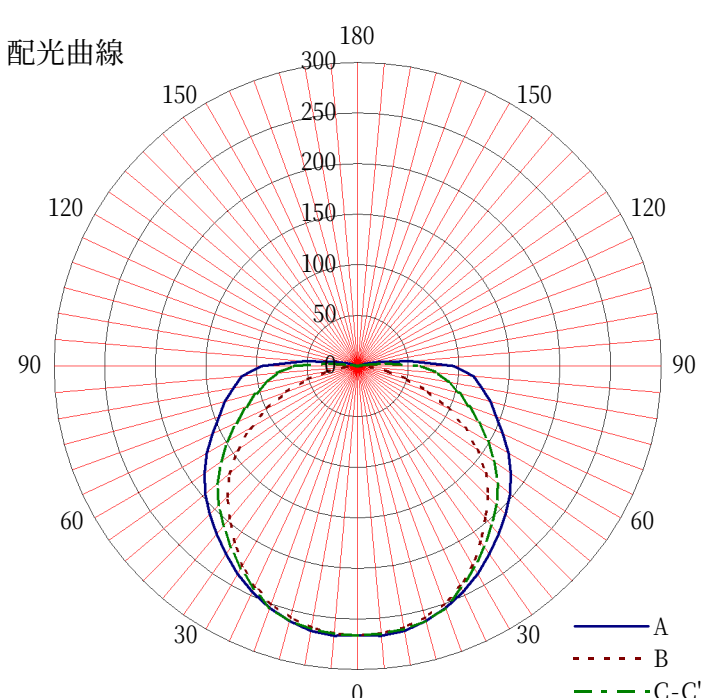


日立照明器具 照明特性

形式: NKE4105-PK14		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	0.6	0.54	0.41	0.33	0.52	0.40	0.33	0.27	0.39	0.32	0.27	0.38	0.31	0.27	0.24	
	0.8	0.63	0.50	0.42	0.61	0.50	0.42	0.36	0.48	0.41	0.35	0.46	0.40	0.35	0.32	
	1	0.69	0.57	0.49	0.67	0.56	0.48	0.42	0.54	0.47	0.41	0.52	0.46	0.41	0.38	
	1.25	0.75	0.64	0.56	0.73	0.62	0.55	0.49	0.60	0.53	0.48	0.58	0.52	0.47	0.44	
	1.5	0.79	0.69	0.61	0.77	0.68	0.60	0.54	0.65	0.59	0.53	0.63	0.57	0.52	0.49	
	2	0.85	0.76	0.69	0.83	0.75	0.68	0.62	0.72	0.66	0.61	0.69	0.64	0.60	0.57	
	2.5	0.88	0.81	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.73	0.69	0.65	0.62	
	3	0.91	0.84	0.78	0.89	0.82	0.77	0.72	0.79	0.75	0.70	0.77	0.73	0.69	0.65	
光源		4	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.84	0.80	0.76	0.81	0.78	0.74	0.71
品名	LED直管ランプ	5	0.96	0.92	0.87	0.94	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.78	0.75
形式	LDK40SS N/26L/24	7	0.99	0.96	0.92	0.97	0.94	0.91	0.88	0.91	0.88	0.86	0.88	0.86	0.84	0.80
器具光束	2,240 lm	10	1.02	0.99	0.96	1.00	0.97	0.95	0.93	0.94	0.92	0.90	0.91	0.90	0.88	0.84
器具効率 Ft= 100.0%			単体照度分布(初期) 													
上方光束 Fu= 3.9%																
下方光束 Fd= 96.1%																
配光分類																
BZ-																
最大取付間隔			配光曲線 													
A-A 1.34 H																
B-B 1.28 H																
保守率	良	0.78														
	中	0.74														
	否	0.66														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	266	266	266													
10	266	262	264													
20	254	250	254													
30	237	228	231													
40	217	196	206													
50	196	165	181													
60	172	123	149													
70	145	75	117													
80	124	30	90													
90	95		63													
100	23		6													
110	1		1													
120																
130																
140																
150																
160																
170																
180																