

日立照明器具 照明特性


形式: NKE4205-J14A		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.55	0.42	0.34	0.53	0.41	0.33	0.28	0.40	0.33	0.28	0.39	0.32	0.28	0.25			
		0.8	0.64	0.51	0.43	0.62	0.51	0.43	0.37	0.49	0.42	0.36	0.47	0.41	0.36	0.34			
		1	0.70	0.58	0.50	0.68	0.57	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.42	0.40			
		1.25	0.76	0.65	0.57	0.74	0.64	0.56	0.50	0.62	0.55	0.50	0.60	0.54	0.49	0.46			
		1.5	0.80	0.70	0.63	0.78	0.69	0.62	0.56	0.67	0.60	0.55	0.64	0.59	0.54	0.52			
		2	0.86	0.78	0.71	0.84	0.76	0.70	0.64	0.74	0.68	0.63	0.71	0.66	0.62	0.59			
		2.5	0.90	0.82	0.76	0.88	0.81	0.75	0.70	0.78	0.73	0.69	0.76	0.71	0.68	0.64			
		3	0.92	0.86	0.80	0.90	0.84	0.79	0.74	0.81	0.77	0.73	0.79	0.75	0.71	0.68			
光源		4	0.96	0.90	0.85	0.94	0.89	0.84	0.80	0.86	0.82	0.79	0.83	0.80	0.77	0.74			
品名	LED直管ランプ	5	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.86	0.84	0.81	0.78			
形式	LDK40SS/N/18/24	7	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.93	0.90	0.88	0.90	0.88	0.86	0.83			
器具光束	4,290 lm	10	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.96	0.94	0.93	0.93	0.92	0.91	0.87			

器具効率 Ft= 100.0%
 上方光束 Fu= 2.4%
 下方光束 Fd= 97.6%

配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	277	277	277		
10	272	274	272		
20	266	261	263		
30	248	237	244		
40	226	208	216		
50	204	168	189		
60	182	125	155		
70	152	76	126		
80	110	34	89		
90	48		34		
100	18		5		
110	1				
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

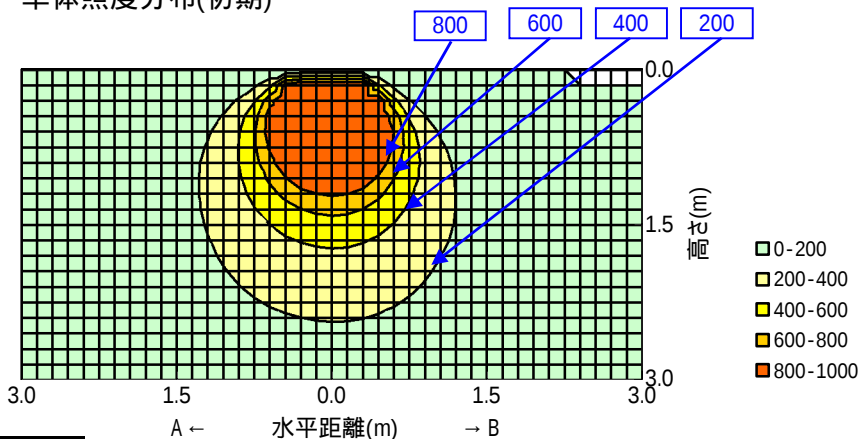

配光曲線

