


日立照明器具 照明特性


名称:直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NKE4205-JM14AE	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.50	0.39	0.32	0.49	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.59	0.48	0.40	0.57	0.47	0.40	0.35	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
姿図 	1	0.64	0.54	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.50	0.44	0.40	0.37	
	1.25	0.70	0.60	0.53	0.68	0.59	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.46	0.43	
	1.5	0.74	0.65	0.58	0.72	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.55	0.51	0.48	
	2	0.79	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.63	0.59	0.66	0.61	0.58	0.55	
	2.5	0.82	0.76	0.70	0.80	0.74	0.69	0.65	0.72	0.67	0.64	0.69	0.66	0.62	0.59	
	3	0.84	0.79	0.74	0.83	0.77	0.73	0.68	0.75	0.71	0.67	0.72	0.69	0.66	0.63	
	4	0.87	0.83	0.78	0.86	0.81	0.77	0.74	0.79	0.75	0.72	0.76	0.73	0.71	0.68	
光源	5	0.89	0.85	0.82	0.88	0.84	0.81	0.78	0.81	0.79	0.76	0.79	0.76	0.74	0.71	
品名:直管形LEDランプ	形式:LDK40SS・D/17/26NE	7	0.92	0.89	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.82	0.81	0.79	0.76
光束:5,240 lm	10	0.94	0.92	0.90	0.92	0.90	0.88	0.87	0.88	0.86	0.85	0.85	0.84	0.83	0.79	

器具効率 Ft= 90.7%
 上方光束 Fu= 2.6%
 下方光束 Fd= 88.2%

最大取付間隔		
A-A	1.32	H
B-B	1.24	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	270	270	270		
10	265	265	264		
20	253	248	250		
30	237	223	230		
40	214	191	203		
50	187	151	169		
60	162	111	136		
70	135	67	107		
80	92	27	72		
90	43		28		
100	25		10		
110	5				
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

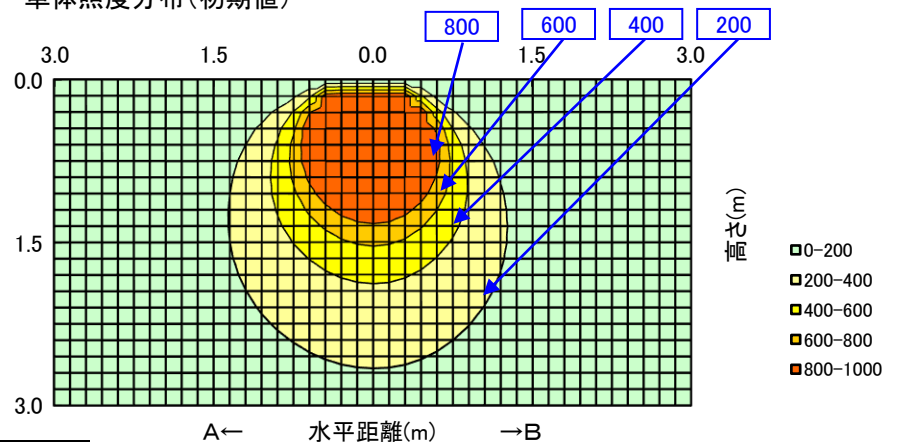

配光曲線
(cd/1000 lm)

