
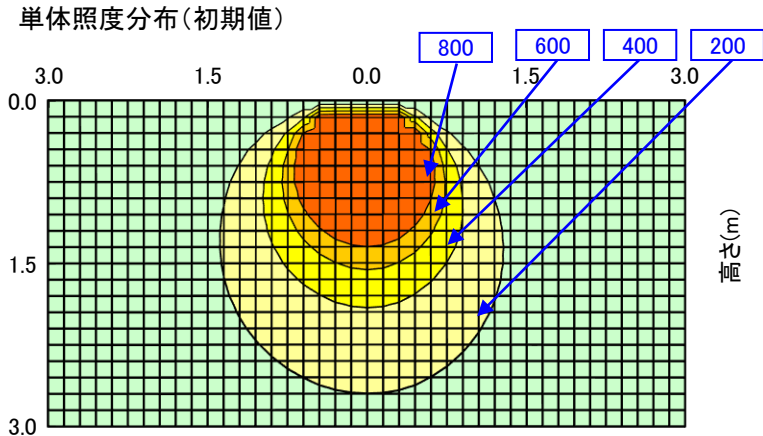
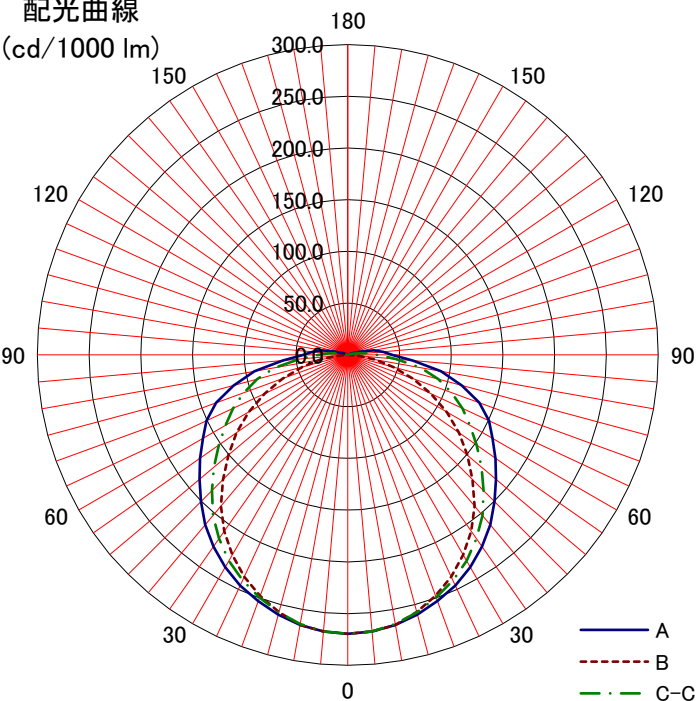


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: NKE4205-JM14AE	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.50	0.39	0.32	0.49	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.59	0.48	0.40	0.57	0.47	0.40	0.35	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
姿図 	1	0.64	0.54	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.50	0.44	0.40	0.37	
	1.25	0.70	0.60	0.53	0.68	0.59	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.46	0.43	
	1.5	0.74	0.65	0.58	0.72	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.55	0.51	0.48	
	2	0.79	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.63	0.59	0.66	0.61	0.58	0.55	
	2.5	0.82	0.76	0.70	0.80	0.74	0.69	0.65	0.72	0.67	0.64	0.69	0.66	0.62	0.59	
	3	0.84	0.79	0.74	0.83	0.77	0.73	0.68	0.75	0.71	0.67	0.72	0.69	0.66	0.63	
光源	4	0.87	0.83	0.78	0.86	0.81	0.77	0.74	0.79	0.75	0.72	0.76	0.73	0.71	0.68	
品名 直管形LEDランプ	5	0.89	0.85	0.82	0.88	0.84	0.81	0.78	0.81	0.79	0.76	0.79	0.76	0.74	0.71	
形式 LDK40SS・N/17/27NE	7	0.92	0.89	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.82	0.81	0.79	0.76	
光束 5,400 lm	10	0.94	0.92	0.90	0.92	0.90	0.88	0.87	0.88	0.86	0.85	0.85	0.84	0.83	0.79	
器具効率 Ft= 90.7%		単体照度分布(初期値) 														
上方光束 Fu= 2.6%																
下方光束 Fd= 88.2%																
最大取付間隔		A← 水平距離(m) →B														
A-A 1.32 H																
B-B 1.24 H																
保守率	良	0.86	配光曲線 (cd/1000 lm) 													
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	270	270	270													
10	265	265	264													
20	253	248	250													
30	237	223	230													
40	214	191	203													
50	187	151	169													
60	162	111	136													
70	135	67	107													
80	92	27	72													
90	43		28													
100	25		10													
110	5															
120																
130																
140																
150																
160																
170																
180																