
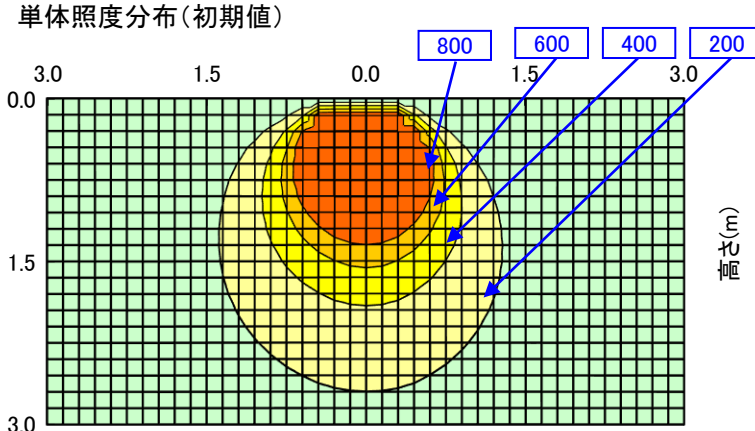
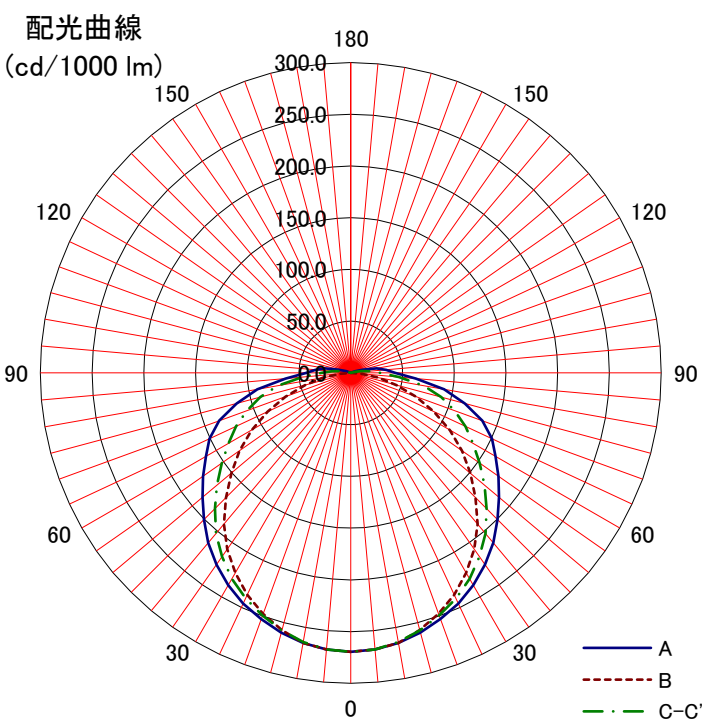


日立照明器具 照明特性																																																																																																																																									
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																									
		床	10%														0%																																																																																																																								
形式: NKE4205-JM14AEC	室指数	照明率 S/H=1.0																																																																																																																																							
〈備考〉	0.6	0.50	0.39	0.32	0.49	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.24																																																																																																																										
	0.8	0.59	0.48	0.40	0.57	0.47	0.40	0.35	0.45	0.39	0.34	0.44	0.38	0.34	0.32																																																																																																																										
姿図 	1	0.64	0.54	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.50	0.44	0.40	0.37																																																																																																																										
	1.25	0.70	0.60	0.53	0.68	0.59	0.52	0.47	0.57	0.51	0.46	0.55	0.50	0.46	0.43																																																																																																																										
	1.5	0.74	0.65	0.58	0.72	0.64	0.57	0.52	0.62	0.56	0.51	0.60	0.55	0.51	0.48																																																																																																																										
	2	0.79	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.63	0.59	0.66	0.61	0.58	0.55																																																																																																																										
	2.5	0.82	0.76	0.70	0.80	0.74	0.69	0.65	0.72	0.67	0.64	0.69	0.66	0.62	0.59																																																																																																																										
	3	0.84	0.79	0.74	0.83	0.77	0.73	0.68	0.75	0.71	0.67	0.72	0.69	0.66	0.63																																																																																																																										
	4	0.87	0.83	0.78	0.86	0.81	0.77	0.74	0.79	0.75	0.72	0.76	0.73	0.71	0.68																																																																																																																										
光源	5	0.89	0.85	0.82	0.88	0.84	0.81	0.78	0.81	0.79	0.76	0.79	0.76	0.74	0.71																																																																																																																										
品名 直管形LEDランプ	7	0.92	0.89	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.82	0.81	0.79	0.76																																																																																																																										
形式 LDK40SS・N/17/27NE	10	0.94	0.92	0.90	0.92	0.90	0.88	0.87	0.88	0.86	0.85	0.85	0.84	0.83	0.79																																																																																																																										
光束 5,400 lm																																																																																																																																									
器具効率 Ft= 90.7%		単体照度分布(初期値) 																																																																																																																																							
上方光束 Fu= 2.6%																																																																																																																																									
下方光束 Fd= 88.2%																																																																																																																																									
最大取付間隔		配光曲線 																																																																																																																																							
A-A 1.32 H																																																																																																																																									
B-B 1.24 H																																																																																																																																									
保守率	良																0.86																																																																																																																								
	中																0.81																																																																																																																								
	否																0.72																																																																																																																								
光度 (cd/1000 lm)																	<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>270</td><td>270</td><td>270</td><td></td><td></td></tr><tr><td>10</td><td>265</td><td>265</td><td>264</td><td></td><td></td></tr><tr><td>20</td><td>253</td><td>248</td><td>250</td><td></td><td></td></tr><tr><td>30</td><td>237</td><td>223</td><td>230</td><td></td><td></td></tr><tr><td>40</td><td>214</td><td>191</td><td>203</td><td></td><td></td></tr><tr><td>50</td><td>187</td><td>151</td><td>169</td><td></td><td></td></tr><tr><td>60</td><td>162</td><td>111</td><td>136</td><td></td><td></td></tr><tr><td>70</td><td>135</td><td>67</td><td>107</td><td></td><td></td></tr><tr><td>80</td><td>92</td><td>27</td><td>72</td><td></td><td></td></tr><tr><td>90</td><td>43</td><td></td><td>28</td><td></td><td></td></tr><tr><td>100</td><td>25</td><td></td><td>10</td><td></td><td></td></tr><tr><td>110</td><td>5</td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																	A-0	B-B	C-0	A'-0	C'-0	0	270	270	270			10	265	265	264			20	253	248	250			30	237	223	230			40	214	191	203			50	187	151	169			60	162	111	136			70	135	67	107			80	92	27	72			90	43		28			100	25		10			110	5					120						130						140						150						160		
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																				
0	270	270	270																																																																																																																																						
10	265	265	264																																																																																																																																						
20	253	248	250																																																																																																																																						
30	237	223	230																																																																																																																																						
40	214	191	203																																																																																																																																						
50	187	151	169																																																																																																																																						
60	162	111	136																																																																																																																																						
70	135	67	107																																																																																																																																						
80	92	27	72																																																																																																																																						
90	43		28																																																																																																																																						
100	25		10																																																																																																																																						
110	5																																																																																																																																								
120																																																																																																																																									
130																																																																																																																																									
140																																																																																																																																									
150																																																																																																																																									
160																																																																																																																																									
170																																																																																																																																									
180																																																																																																																																									