
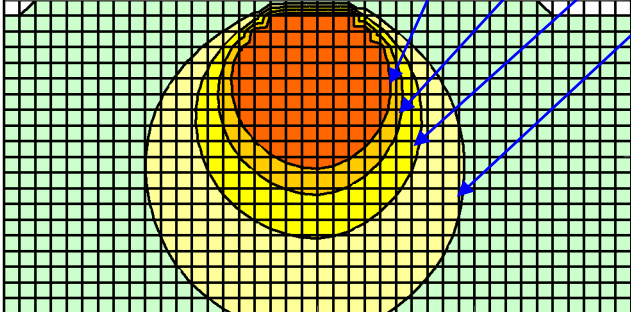


日立照明器具 照明特性

形式：NLE32401L-JZ14A		天井	80%			70%				50%			30%			0%
<定格出力タイプ>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
<電球色相当>		床	10%													0%
<初期照度補正、連続調光共用形>		室指数	照明率 S/H=1.0													
姿図 		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33
		0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42
		1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49
		1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56
		1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69
		2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82
品名	LED	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90
光束	5,480 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93

器具効率 Ft= 100.0%			単体照度分布(初期) 					上方光束 Fu= 0.0%		
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔										
A-A 1.32 H										
B-B 1.14 H										
保守率	良	0.86								
	中	0.81								
	否	0.72								
光度 (cd/1000 lm)										
	A-0	B-B	C-0	A'-0	C'-0					
0	379	379	379							
10	373	361	367							
20	358	325	342							
30	336	284	304							
40	299	226	254							
50	257	171	206							
60	198	113	143							
70	119	55	79							
80	49	26	31							
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										

配光曲線		
