
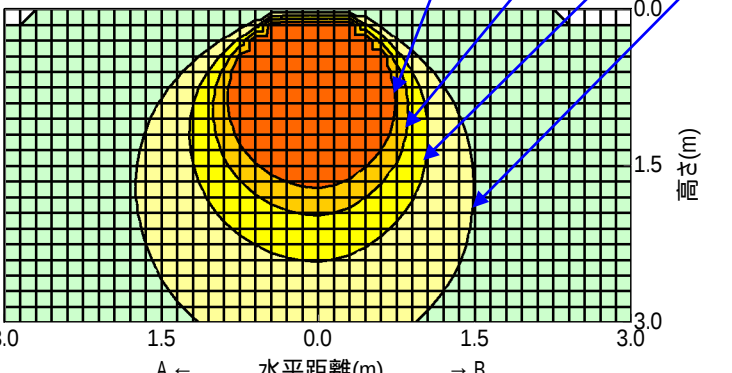
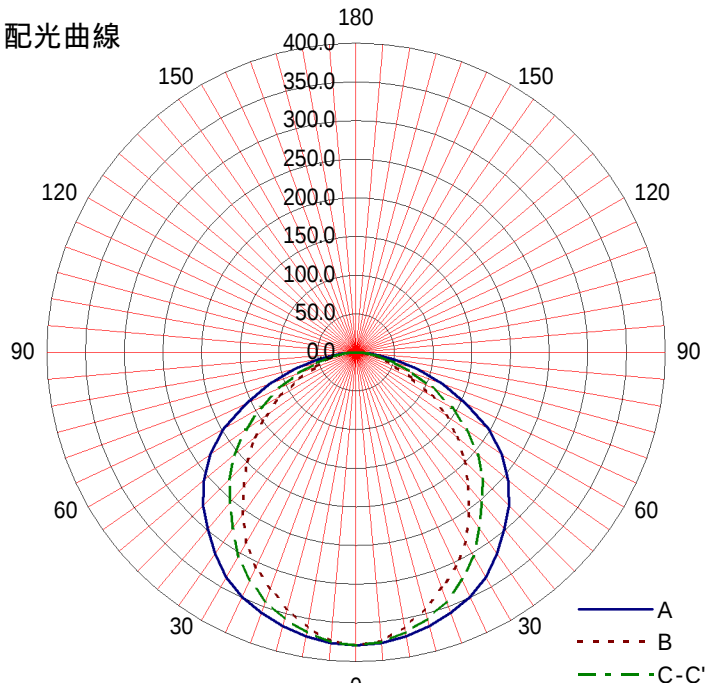


日立照明器具 照明特性

形式: NLE32401N-JZ14A		天井 壁 床 反射率	80%			70%				50%			30%			0%	
<定格出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
<昼白色相当>			10%														0%
<初期照度補正、連続調光共用形>			照明率 S/H=1.0														
姿図 		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
		0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42	
		1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49	
		1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56	
		1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62	
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69	
		2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74	
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77	
		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
		品名	LED	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
光束	6,160 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100.0%			単体照度分布(初期) 														
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.32 H																	
B-B 1.14 H																	
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)			配光曲線 														
	A-0	B-B															C-0
	0	379	379	379													
	10	373	361	367													
	20	358	325	342													
	30	336	284	304													
	40	299	226	254													
	50	257	171	206													
	60	198	113	143													
	70	119	55	79													
	80	49	26	31													
	90																
	100																
	110																
	120																
	130																
	140																
	150																
	160																
	170																
	180																