



日立照明器具 照明特性

形式: NLE32401N-JZ14 <定格出力タイプ> <昼白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	姿図	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
		0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42	
		1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49	
		1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56	
		1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62	
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69	
		2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74	
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
品名	LED	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
光束	6,160 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	


器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A		1.32	H		
B-B		1.14	H		
保守率	良	0.81			
	中	0.77			
	否	0.68			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	379	379	379		
10	373	361	367		
20	358	325	342		
30	336	284	304		
40	299	226	254		
50	257	171	206		
60	198	113	143		
70	119	55	79		
80	49	26	31		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

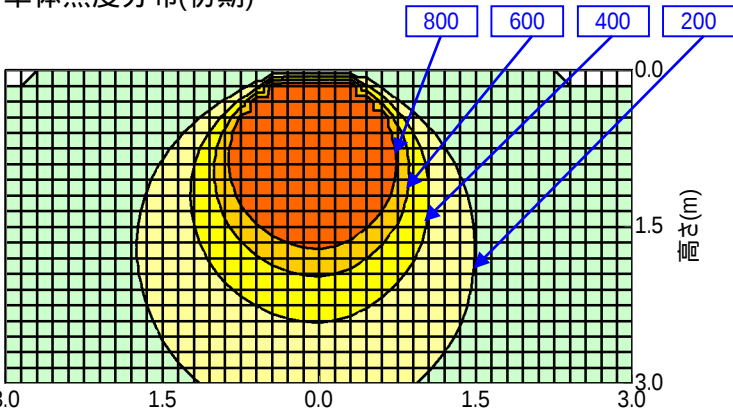

単位: 0-200, 200-400, 400-600, 600-800, 800-1000

配光曲線

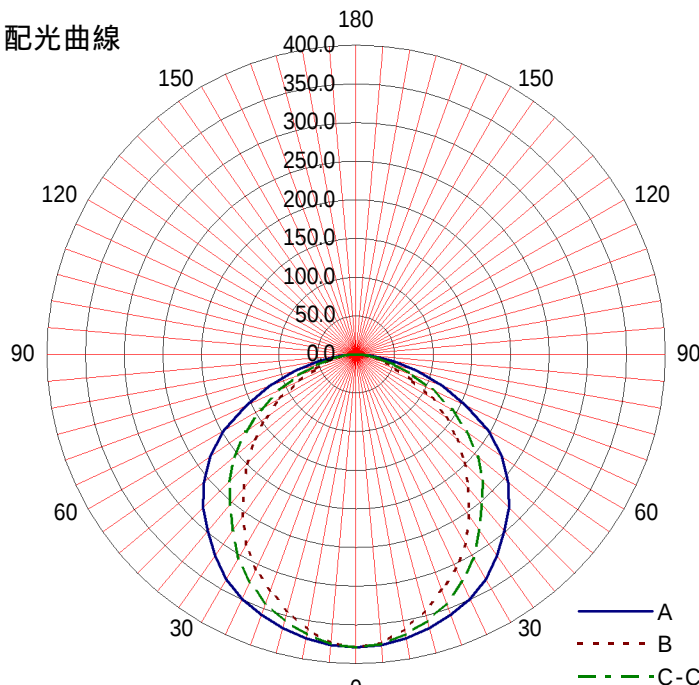

単位: A, B, C-C'