
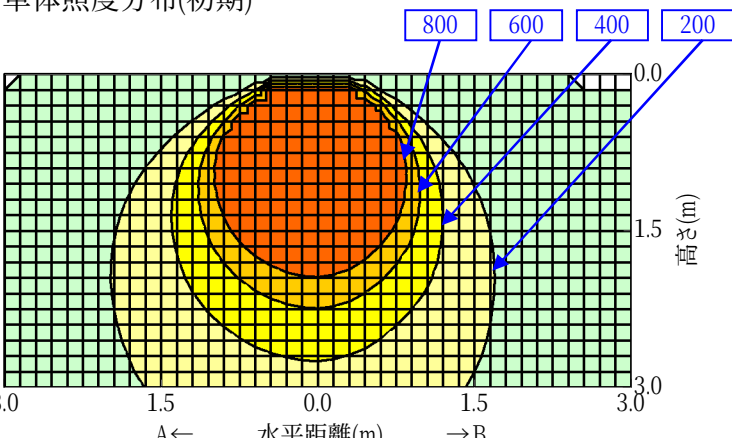


日立照明器具 照明特性

形式: NLE32401N-JZU14 <高出力タイプ> <昼白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33		
	0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42		
	1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49		
	1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56		
	1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62		
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69		
	2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74		
	3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77		
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82		
光源	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85		
品名	LED	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
形式		10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
光束	7,960 lm																

器具効率 Ft= 100.0%				単体照度分布(初期) 											
上方光束 Fu= 0.0%															
下方光束 Fd= 100.0%															
配光分類															
BZ-															
最大取付間隔															
A-A 1.32 H															
B-B 1.14 H															
保守率	良	0.81													
	中	0.77													
	否	0.68													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	379	379	379												
10	373	361	367												
20	358	325	342												
30	336	284	304												
40	299	226	254												
50	257	171	206												
60	198	113	143												
70	119	55	79												
80	49	26	31												
90															
100															
110															
120															
130															
140															
150															
160															
170															
180															

配光曲線	
