



日立照明器具 照明特性

形式: NLE32401W-JZ14A		天井	80%			70%				50%			30%			0%	
<定格出力タイプ>		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
<白色相当>			床	10%													0%
<初期照度補正、連続調光共用形>		室指数	照明率 S/H=1.0														
姿図 		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
		0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42	
		1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49	
		1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56	
		1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62	
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69	
		2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74	
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
品名	LED	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
光束	5,910 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			
上方光束 Fu= 0.0%			
下方光束 Fd= 100.0%			
配光分類			
BZ-			
最大取付間隔			
A-A		1.32	H
B-B		1.14	H
保守率	良	0.86	
	中	0.81	
	否	0.72	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	379	379	379
10	373	361	367
20	358	325	342
30	336	284	304
40	299	226	254
50	257	171	206
60	198	113	143
70	119	55	79
80	49	26	31
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

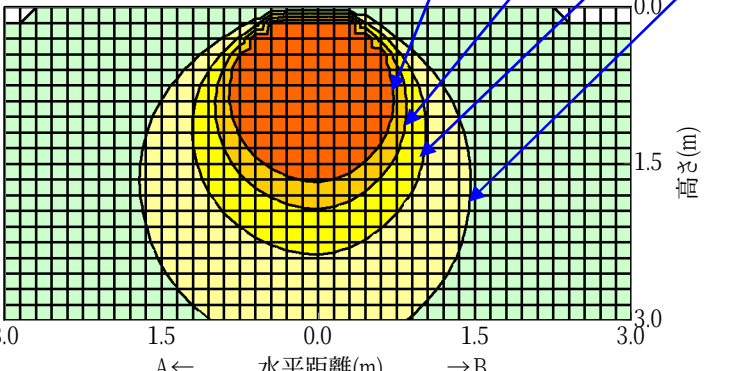

800


600

400

200

0-200
200-400
400-600
600-800
800-1000

配光曲線

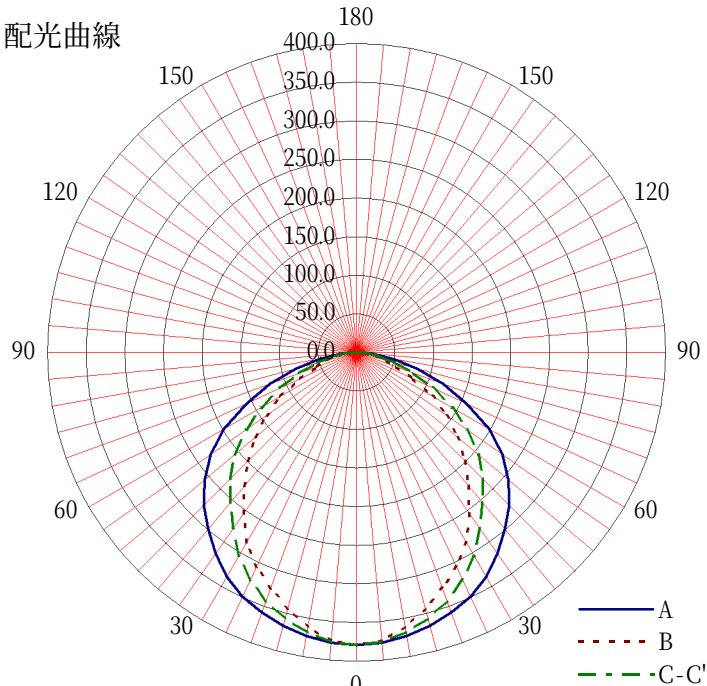

A
B
C-C'